



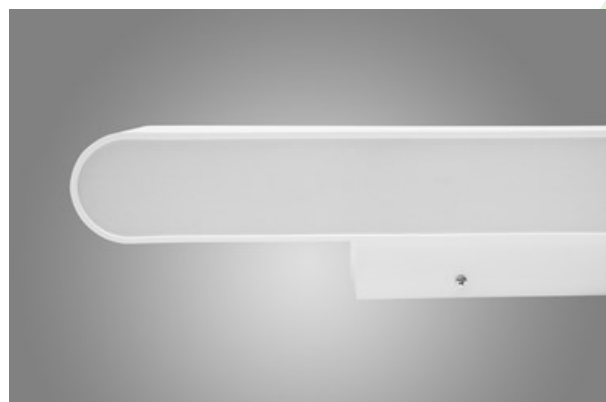

## ARTSHAPE LINE WALL

### Architectural luminaires

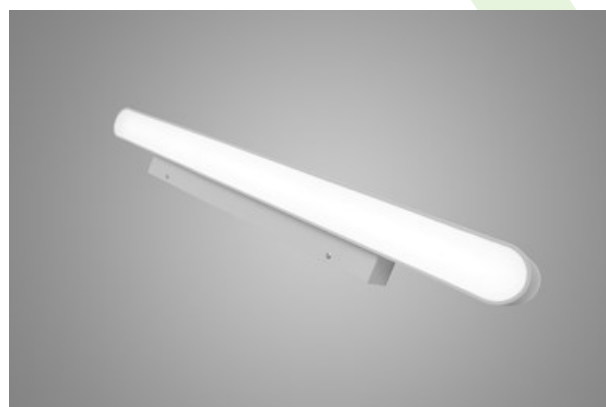

Modernistic architectural luminaire in shapes of popular geometrical figures and fashionable design of simple form. The luminaire is adjusted to be mounted on the wall. It is equipped with highly efficient LED light sources. Various options of luminous flux and colour temperature are available. The sides of the shade are made of thin-walled aluminium profile. In combination with a possibility of painting according to RAL palette, the luminaires allow to achieve a unique arrangement of various premises. Perfectly even surface-emitting is made of material which has very good light transmittance factor and has good diffusion parameters. This luminaire is dedicated to room of high stylistic requirements. It is perfect for hotel atrium, office receptions, architectural studios, conference rooms or halls and corridors in exclusive buildings as well as for theatres or modern shops in shopping centres. Direct-indirect light distribution.






Main parameters:

| Name  | Luminous flux LED [lm] | Power of luminaire [W] | Color [K]   | Dimensions A x B x H [mm] |
|---|------------------------|------------------------|-------------|---------------------------|
| ARTSHAPE LINE WALL L-320 UP&DOWN 650/650    | 1349 / 1420            | 9                      | 3000 / 4000 | 320 x 110 x 85            |
| ARTSHAPE LINE WALL L-600 UP&DOWN 1300/1300  | 2698 / 2840            | 17                     | 3000 / 4000 | 600 x 110 x 85            |
| ARTSHAPE LINE WALL L-900 UP&DOWN 1950/1950  | 4047 / 4260            | 26                     | 3000 / 4000 | 900 x 110 x 85            |
| ARTSHAPE LINE WALL L-1150 UP&DOWN 2600/2600 | 5396 / 5680            | 34                     | 3000 / 4000 | 1150 x 110 x 85           |

Technical drawing:



Light and electrical features:

|   |   |
|---|---|
| Light source                              | LED                                     |
| Voltage                                   | 220..240 V, 50..60 Hz                   |
| Lifetime of LED sources [h]               | 60000                                   |
| Lx/By                                     | L80/B10                                 |
| CRI                                       | >80                                     |
| SDCM (LED sources)                        | 3                                       |
| Photobiological risk class (IEC/EN 62471) | RG0                                     |
| Operating temperature range [°C]          | 0 ÷ 30                                  |
| Driver                                    | standard on/off (E)<br>DIM DALI (EDD) * |
| Power factor cos φ                        | >0,95                                   |

\* Variant to specify when ordering

Mechanical features:

|          |   |
|----------|---|
| Assembly | mounted on wall   |
| Material | aluminum  |
| Color    | RAL 7016 (anthracite, metallic, fine structure)<br>RAL 9016 (white) * |
| Diffuser | PLX (PMMA opal)   |

Additional information:

These luminaires are characterised by tightly closed chamber of LED light sources (IP65) thanks to this impurities are not visible on the diffuser for a long time of exploitation. Temperature range for storage and transport from 0° C to 40° C. The luminaire can be made in CLO version.

Note: The power shown refers to the whole system (tolerance +/- 10%).  
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 24-04-2024