





ARTSHAPE LINE WALL

Architectural luminaires







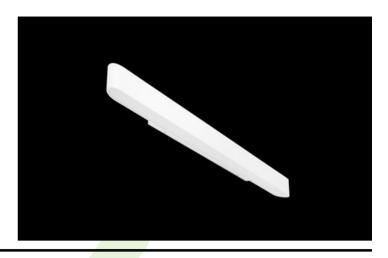

Modernistic architectural luminary in shapes of popular geometrical figures and fashionable design of simple form. The luminary is adjusted to be mounted on the wall. It is equipped with highly efficient LED light sources. Various options of luminous flux and colour temperature are available. The sides of the shade are made of thinwalled aluminium profile. In combination with a possibility of painting according to RAL palete, the luminaries allow to achieve a unique arrangement of various premises. Perfectly even surface-emitting is made of material which has very good light transmittance factor and has good diffusion parameters. This luminary is dedicated to room of high stylistic requirements. It is perfect for hotel atrium, office receptions, architectural studios, conference rooms or halls and corridors in exclusive buildings as well as for theatres or modern shops in shopping centres. Direct-indirect light distribution.





















Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
ARTSHAPE LINE WALL L-320 UP&DOWN 650/650	1349 / 1420	9	3000 / 4000	320 x 110 x 85
ARTSHAPE LINE WALL L-600 UP&DOWN 1300/1300	2698 / 2840	17	3000 / 4000	600 x 110 x 85
ARTSHAPE LINE WALL L-900 UP&DOWN 1950/1950	4047 / 4260	26	3000 / 4000	900 x 110 x 85
ARTSHAPE LINE WALL L-1150 UP&DOWN 2600/2600	5396 / 5680	34	3000 / 4000	1150 x 110 x 85

Technical drawing:





Light and electrical features:

Light source	LED
Voltage	220240 V, 5060 Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Operating temperature range [°C]	0 ÷ 30
Driver	standard on/off (E) DIM DALI (EDD) *
Power factor cos φ	>0,95

Mechanical features:

Assembly	mounted on wall
Material	aluminum
Color	RAL 7016 (anthracite, metallic, fine structure) RAL 9016 (white) *
Diffuser	PLX (PMMA opal)

Additional information:

These luminaires are characterised by tightly closed chamber of LED light sources (IP65) thanks to this impurities are not visible on the diffuser for a long time of exploitation. Temperature range for storage and transport from 0° C to 40° C. The luminaire can be made in CLO version.

^{*} Variant to specify when ordering