




## ARUNA SLIM SUSPENDED LED

Surface mounted luminaires



LED luminaire dedicated to be mounted on suspended modular ceilings or using an adaptor frame in plasterboard ceilings (Aruna Slim M LED), directly on the ceiling (Aruna Slim Surface LED) or using slings (Aruna Slim Suspended LED). Equipped with highly efficient LED light sources. Symmetric or asymmetric light distribution. Housing made of steel sheet. Standard colour of the luminaire is white. Colour rendering index CRI: 80.

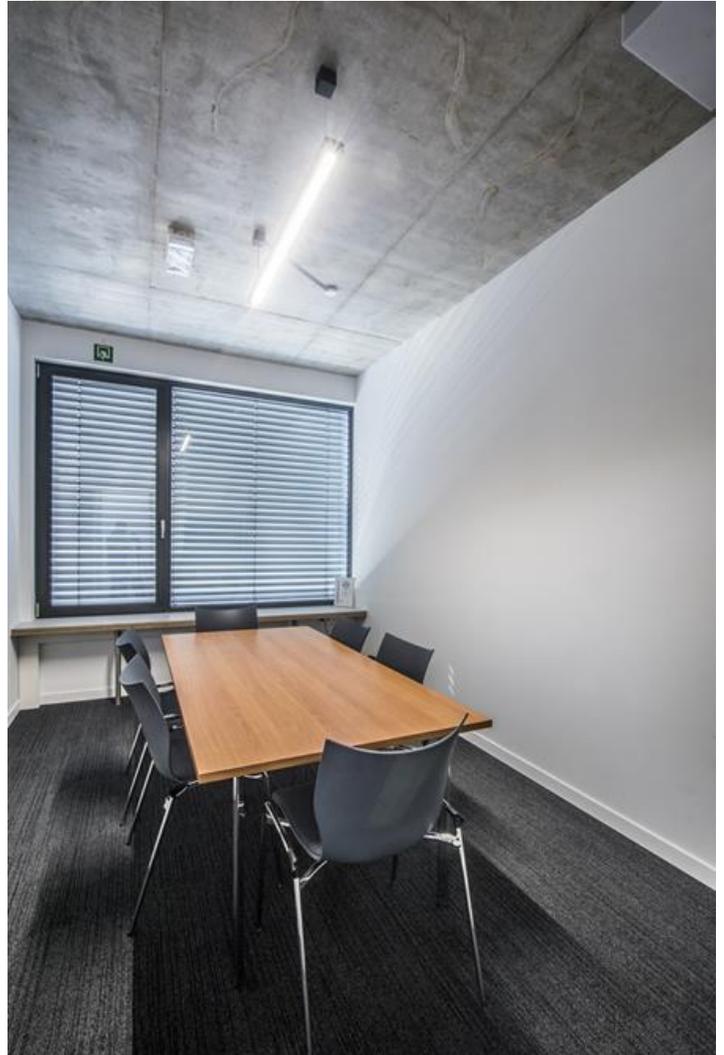



Grimm, Berlin



**Main parameters:**

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
ARUNA SLIM SUSPENDED LED 4400	4565	24,7	4000	1193 x 80 x 40 / 1193 x 80 x 43
ARUNA SLIM SUSPENDED LED 8000	8330	57	4000	1193 x 80 x 40 / 1193 x 80 x 43

**Technical drawing:**

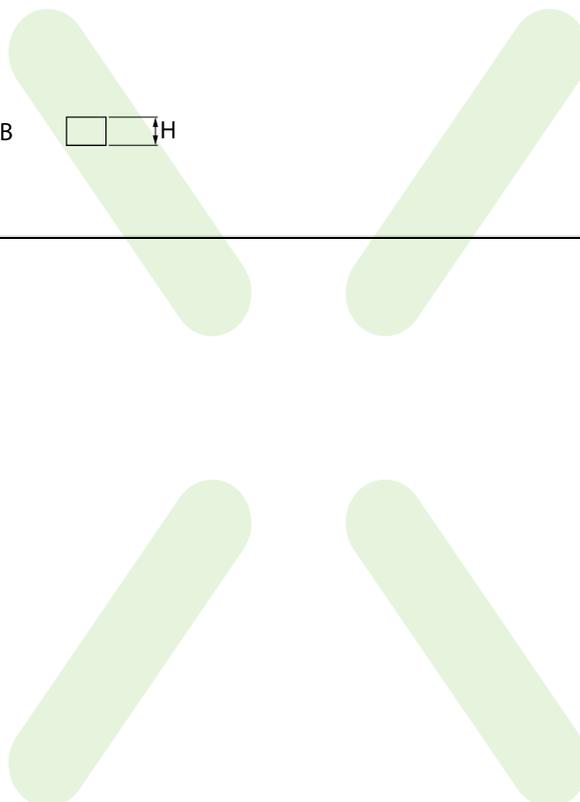

**Light and electrical features:**

<b>Light source</b>	LED
<b>Voltage</b>	220..240 V, 50..60 Hz
<b>Lifetime of LED sources [h]</b>	100000 (1) / 147000 (2)
<b>Lx/By</b>	L80/B10 (1) / L70/B50 (2)
<b>CRI</b>	>80
<b>SDCM (LED sources)</b>	3
<b>Operating temperature range [°C]</b>	5 ÷ 30
<b>Driver</b>	standard on/off (E)
<b>Power factor cos φ</b>	>0,95

**Mechanical features:**

<b>Assembly</b>	surface mounted on slings
<b>Material</b>	steel sheet
<b>Color</b>	RAL 9016 (white)
<b>Diffuser</b>	OPTICS (optical system based on lenses)



Note: The power shown refers to the whole system (tolerance +/- 10%).  
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 07-05-2026