




BACKPANEL LED

Recessed luminaires










Modern LED panel dedicated to be mounted on suspended modular ceilings, cardboard suspended ceilings (using adaptive frame), directly on the ceiling (using adaptive frame) or using adaptive frame and suspensions. Equipped with the highly efficient LED sources. Direct light distribution. Luminary body made from steel sheet. PMMA opal diffuser. Colour of luminary - white. CRI>80. Luminary dedicated for the public use structure like offices, conference rooms, classrooms, lecture halls etc.

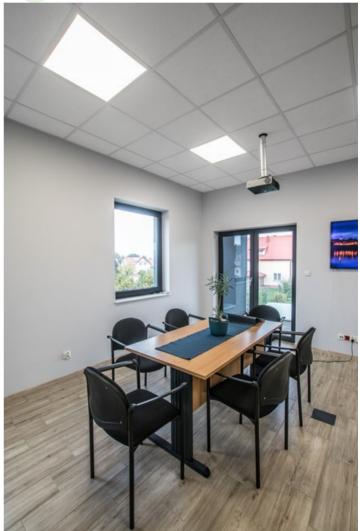

"Elclim" office, Toruń


















Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
BACKPANEL LED 3800	3728 / 3924	20,6	3000 / 4000	596 x 596 x 34 / 1195 x 295 x 34
BACKPANEL LED 4800	4822 / 5075	27,2	3000 / 4000	596 x 596 x 34 / 1195 x 295 x 34
BACKPANEL LED 5800	5538 / 5829	31,8	3000 / 4000	596 x 596 x 34 / 1195 x 295 x 34

Technical drawing:



Light and electrical features:

Light source	LED
Voltage	220240 V, 5060 Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Operating temperature range [°C]	5 ÷ 30
Driver	standard on/off (E) DIM DALI (EDD) *
Power factor cos φ	>0,95

^{*} Variant to specify when ordering

Mechanical features:

Assembly	mounted in module ceilings as well as plasterboard ceilings, directly mounted to ceiling construction and surface mounted on slings using accessories		
Material	steel sheet		
Color	RAL 9016 (white)		
Diffuser	Micro-PRM (micro-prismatic diffuser PMMA)		

Additional information:

The luminaire can be made in CLO version.