






### **BERYL LED NK**

#### **Surface mounted luminaires**







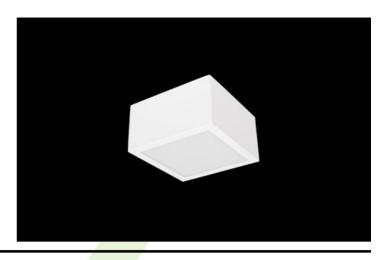

Surface mounted luminary of down light type which is built from powder coated steel sheet. IP20 tightness level. Its diffuser optionally can be made from opal PMMA. BERYL LED NO/NK luminary is perfect to be used in prestige interiors such as hotels, banks, offices, boutiques, and car showrooms.



"Stara Łaźnia" art Gallery, Suwałki


















## Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
BERYL LED NK 1500	1500	10	3000 / 4000	200 x 200 x 110
BERYL LED NK 2200	2193 / 2334	16	3000 / 4000	200 x 200 x 110
BERYL LED NK 3000	2791 / 2970	21	3000 / 4000	200 x 200 x 110

## **Technical drawing:**



# **Light and electrical features:**

Light source	LED
Voltage	220240 V, 5060 Hz
Lifetime of LED sources [h]	60000
Lx/By	L80/B10
CRI	>80
SDCM (LED sources)	3
Operating temperature range [°C]	5 ÷ 30
Driver	standard on/off (E)
Power factor cos φ	>0,95

## **Mechanical features:**

Assembly	surface mounted on ceiling	
Material	steel sheet	
Color	RAL 9016 (white)	
Diffuser	PLX (PMMA opal)	