





BERYL PROOF WALL K LED

Outdoor luminaires







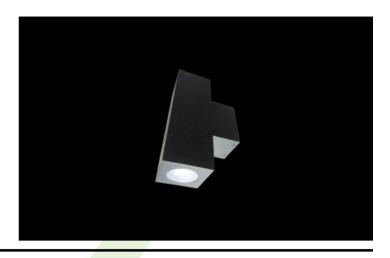

Luminary adapted to be mounted on walls. High lighting efficiency LEDs were used. Its body is made from anodized aluminum profile. It is resistant to solids, dust, and liquids penetration – IP65. This type of luminary is recommended for decorative or accent illumination of buldings.



VIVO! Shopping Mall, Piła


















Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
BERYL PROOF WALL K LED UP&DOWN 2X1000	2300 / 2362	12,2	3000 / 4000	210 x 120 x 370
BERYL PROOF WALL K LED UP&DOWN 2X2000	4400 / 4536	25,2	3000 / 4000	210 x 120 x 370
BERYL PROOF WALL K LED UP OR DOWN 1000	1307 / 1344	8,9	3000 / 4000	210 x 120 x 370
BERYL PROOF WALL K LED UP OR DOWN 2000	2200 / 2268	12,5	3000 / 4000	210 x 120 x 370

Technical drawing:



Light and electrical features:

Light source	LED		
Voltage	220240 V, 5060 Hz		
Lifetime of LED sources [h]	95000 (1) / 100000 (2) / 100000 (3)/88000 (1) / 100000 (2) / 100000 (3)/95000		
Lx/By	L90/B10 (1) / L80/B10 (2) / L70/B10 (3)/L90/B10		
CRI	85		
SDCM (LED sources)	2		
Photobiological risk class (IEC/EN 62471)	RG1		
Operating temperature range [°C]	-25 ÷ 30		
Driver	standard on/off (E) DIM DALI (EDD) *		
Power factor cos φ	>0,95		

Mechanical features:

Assembly	mounted on wall
Material	aluminum
Color	RAL 9005 (black) RAL 9006 (grey, metallic, fine structure) RAL 9016 (white) *
Diffuser	transparent polycarbonate

* Variant to specify when ordering

Additional information:

The luminaire can be made in CLO version.