



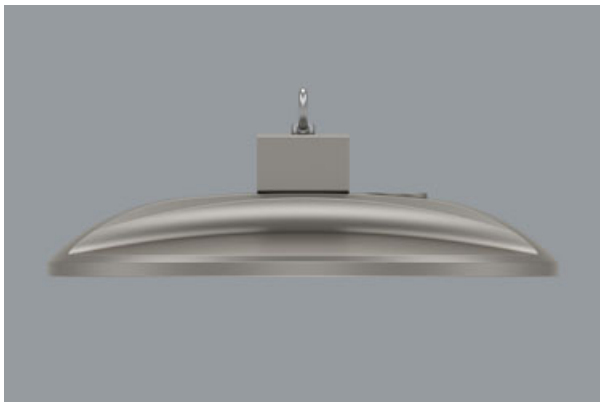

BONANOVA

Industrial luminaires

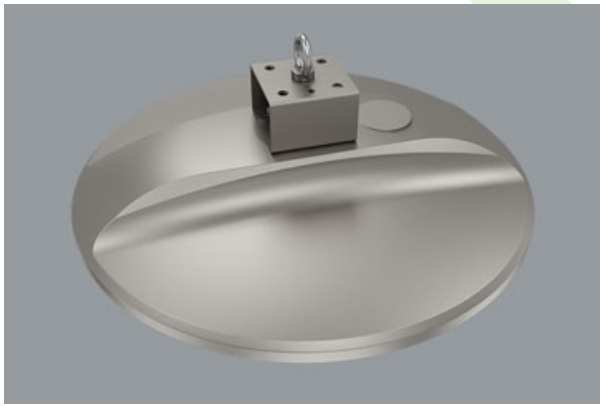


Innovative industrial luminaire with versatile installation options. Sleek housing without external heatsinks. The ingenious design prevents dust and dirt buildup, for optimum performance and extended component lifespan.



Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions D x H [mm]
BONANOVA 12000 MEDIUM	12432 / 12864	71	3000 / 4000 / 5700	Ø480 x 177
BONANOVA 12000 WIDE	12432 / 12864	71	3000 / 4000 / 5700	Ø480 x 177
BONANOVA 12000 ULTRA-WIDE	12432 / 12864	71	3000 / 4000 / 5700	Ø480 x 177
BONANOVA 16000 MEDIUM	17016 / 17688	101,5	3000 / 4000 / 5700	Ø480 x 177
BONANOVA 16000 WIDE	17016 / 17688	101,5	3000 / 4000 / 5700	Ø480 x 177
BONANOVA 16000 ULTRA-WIDE	17016 / 17688	101,5	3000 / 4000 / 5700	Ø480 x 177
BONANOVA 20000 MEDIUM	21332 / 22296	133,3	3000 / 4000 / 5700	Ø480 x 177
BONANOVA 20000 WIDE	21332 / 22296	133,3	3000 / 4000 / 5700	Ø480 x 177
BONANOVA 20000 ULTRA-WIDE	21332 / 22296	133,3	3000 / 4000 / 5700	Ø480 x 177
BONANOVA 24000 MEDIUM	24380 / 25588	157,8	3000 / 4000 / 5700	Ø480 x 177
BONANOVA 24000 WIDE	24380 / 25588	157,8	3000 / 4000 / 5700	Ø480 x 177
BONANOVA 24000 ULTRA-WIDE	24380 / 25588	157,8	3000 / 4000 / 5700	Ø480 x 177

Technical drawing:



Light and electrical features:

Light source	LED
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
CRI	>80
SDCM (LED sources)	3
Operating temperature range [°C]	-40 ÷ 35
Driver	standard on/off (E) DIM DALI (EDD) *
Power factor cos φ	>0,95

* Variant to specify when ordering

Mechanical features:

Assembly	surface mounted on slings
Material	aluminum
Color	RAL 9007 (dark gray)
Diffuser	hardened transparent glass

Note: The power shown refers to the whole system (tolerance +/- 10%).
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 07-11-2024