




DOMINO CLEAN LOW UGR LED

Clean luminaires - recessed

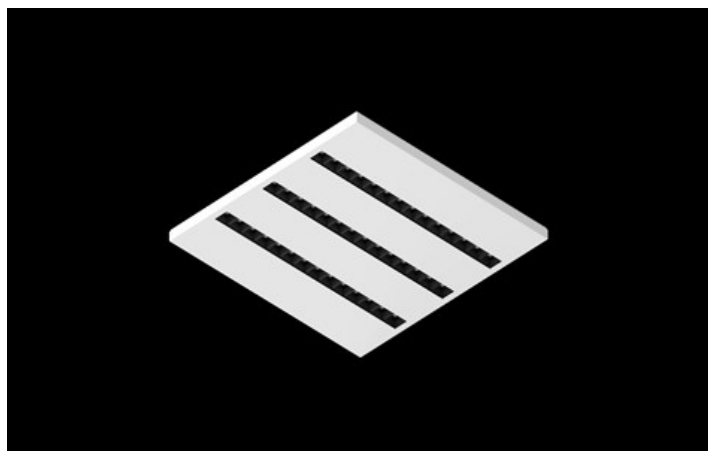


LED luminary dedicated to be mounted on suspended modular ceilings. Equipped with highly efficient LED light sources. The Domino Clean LOW UGR LED uses an anti-glare louvre which reduces glare and directs light precisely. Housing made of steel sheet. Significant diversity of the value of luminous flux. Colour rendering index CRI: 80 or 90. Level of tightness IP65.



Main parameters:

| Name | Luminous flux LED [lm] | Power of luminaire [W] | Color [K] | Dimensions A x B x H [mm] |
|--------------------------------------|------------------------|------------------------|-------------|---------------------------|
| DOMINO CLEAN LOW UGR LED 6300 CRI>80 | 6801 / 7011 | 36,1 | 3000 / 4000 | 592 x 592 x 50 |
| DOMINO CLEAN LOW UGR LED 6300 CRI>90 | 5847 / 6030 | 36,1 | 3000 / 4000 | 592 x 592 x 50 |
| DOMINO CLEAN LOW UGR LED 8400 CRI>80 | 9068 / 9348 | 48,1 | 3000 / 4000 | 592 x 592 x 50 |
| DOMINO CLEAN LOW UGR LED 8400 CRI>90 | 7796 / 8040 | 48,1 | 3000 / 4000 | 592 x 592 x 50 |

Technical drawing:



Light and electrical features:

| | |
|-------------------------------------------|-----------------------------------------|
| Light source | LED |
| Voltage | 220..240 V, 50..60 Hz |
| Lifetime of LED sources [h] | 100000 |
| Lx/By | L80/B10 |
| CRI | >80/>90 |
| SDCM (LED sources) | 3 |
| Photobiological risk class (IEC/EN 62471) | RG0 |
| Operating temperature range [°C] | 5 ÷ 30 |
| Driver | standard on/off (E) DIM DALI (EDD) * |
| Power factor cos φ | 0,95 |

* Variant to specify when ordering

Mechanical features:

| | |
|----------|-----------------------------------------------------------|
| Assembly | mounted in module ceilings |
| Material | steel sheet |
| Color | RAL 9005 (black) RAL 9006 (grey) RAL 9016 (white) * |
| Diffuser | RASTER (anti-glare louver) |

Additional information:

The luminaire can be made in CLO version.