




## DOMINO CLEAN LOW UGR LED

---

Clean luminaires - recessed

---

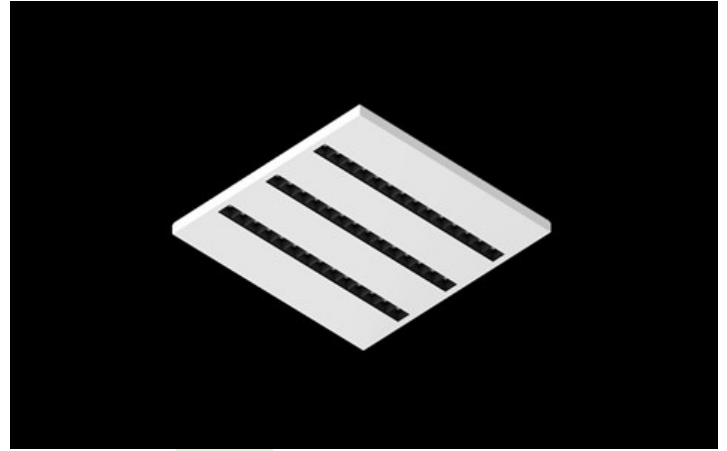


LED luminaire dedicated to be mounted on suspended modular ceilings. Equipped with highly efficient LED light sources. The Domino Clean LOW UGR LED uses an anti-glare louvre which reduces glare and directs light precisely. Housing made of steel sheet. Significant diversity of the value of luminous flux. Colour rendering index CRI: 80 or 90. Level of tightness IP65.



## Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
DOMINO CLEAN LOW UGR LED 6300 CRI>80	6801 / 7011	36,1	3000 / 4000	592 x 592 x 50
DOMINO CLEAN LOW UGR LED 6300 CRI>90	5847 / 6030	36,1	3000 / 4000	592 x 592 x 50
DOMINO CLEAN LOW UGR LED 8400 CRI>80	9068 / 9348	48,1	3000 / 4000	592 x 592 x 50
DOMINO CLEAN LOW UGR LED 8400 CRI>90	7796 / 8040	48,1	3000 / 4000	592 x 592 x 50

## Technical drawing:



## Light and electrical features:

Light source	LED
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
CRI	>80/>90
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Operating temperature range [°C]	5 ÷ 30
Driver	standard on/off (E) DIM DALI (EDD) *
Power factor cos φ	0,95

\* Variant to specify when ordering

## Mechanical features:

Assembly	mounted in module ceilings
Material	steel sheet
Color	RAL 9005 (black) RAL 9006 (grey) RAL 9016 (white) *
Diffuser	RASTER (anti-glare louver)

## Additional information:

The luminaire can be made in CLO version.

Note: The power shown refers to the whole system (tolerance +/- 10%).  
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 03-04-2026