




#### **DOMINO CLEAN LOW UGR LED**

Clean luminaires - recessed

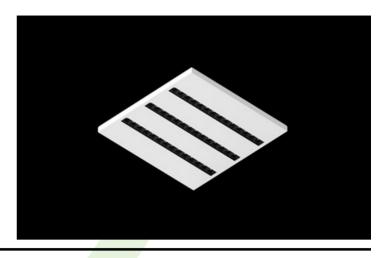

LED luminary dedicated to be mounted on suspended modular ceilings. Equipped with highly efficient LED light sources. The Domino Clean LOW UGR LED uses an anti-glare louvre which reduces glare and directs light precisely. Housing made of steel sheet. Significant diversity of the value of luminous flux. Colour rendering index CRI: 80 or 90. Level of tightness IP65.


















#### Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
DOMINO CLEAN LOW UGR LED 6300 CRI>80	6801 / 7011	36,1	3000 / 4000	592 x 592 x 50
DOMINO CLEAN LOW UGR LED 6300 CRI>90	5847 / 6030	36,1	3000 / 4000	592 x 592 x 50
DOMINO CLEAN LOW UGR LED 8400 CRI>80	9068 / 9348	48,1	3000 / 4000	592 x 592 x 50
DOMINO CLEAN LOW UGR LED 8400 CRI>90	7796 / 8040	48,1	3000 / 4000	592 x 592 x 50

# **Technical drawing:**



# Light and electrical features:

Light source	LED	
Voltage	220240 V, 5060 Hz	
Lifetime of LED sources [h]	100000	
Lx/By	L80/B10	
CRI	>80/>90	
SDCM (LED sources)	3	
Photobiological risk class (IEC/EN 62471)	RG0	
Operating temperature range [°C]	5 ÷ 30	
Driver	standard on/off (E) DIM DALI (EDD) *	
Power factor cos φ	0,95	

<sup>\*</sup> Variant to specify when ordering

## **Mechanical features:**

Assembly	mounted in module ceilings
Material	steel sheet
Color	RAL 9005 (black) RAL 9006 (grey) RAL 9016 (white) *
Diffuser	RASTER (anti-glare louver)

## Additional information:

The luminaire can be made in CLO version.