




#### **DOMINO CLEAN LOW UGR LED UGR<19**

**UGR<19 luminaires** 

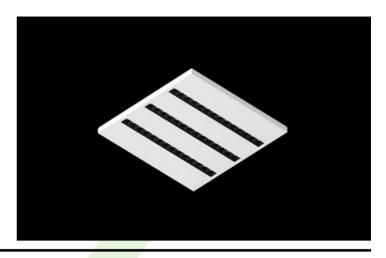

LED luminary dedicated to be mounted on suspended modular ceilings. Equipped with highly efficient LED light sources. The Domino Clean LOW UGR LED uses an anti-glare louvre which reduces glare and directs light precisely. Housing made of steel sheet. Standard colour of the luminary is white. Significant diversity of the value of luminous flux. Colour rendering index CRI: 80. Level of tightness IP65.


















### Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
DOMINO CLEAN LOW UGR LED 6300	6801 / 7011	36,1	3000 / 4000	592 x 592 x 50
DOMINO CLEAN LOW UGR LED 8400	9068 / 9348	48,1	3000 / 4000	592 x 592 x 50

# **Technical drawing:**



# Light and electrical features:

Light source	LED		
Voltage	220240 V, 5060 Hz		
Lifetime of LED sources [h]	100000		
Lx/By	L80/B10		
CRI	>80		
SDCM (LED sources)	3		
Photobiological risk class (IEC/EN 62471)	RG0		
Operating temperature range [°C]	5 ÷ 30		
Driver standard on/of DIM DALI (EDI			
Power factor cos φ	0,95		

<sup>\*</sup> Variant to specify when ordering

#### **Mechanical features:**

Assembly	mounted in module ceilings
Material	steel sheet
Color	RAL 9016 (white)
Diffuser	RASTER (anti-glare louver)

## **Additional information:**

The luminaire can be made in CLO version.