





DOMINO CLEAN SURFACE LOW UGR LED


Clean-Anbauleuchten



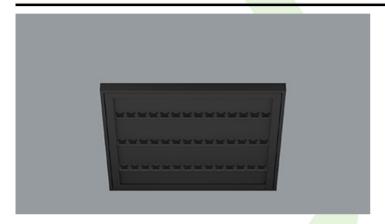

IK08. Schutzklasse: I.

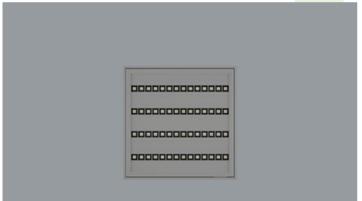

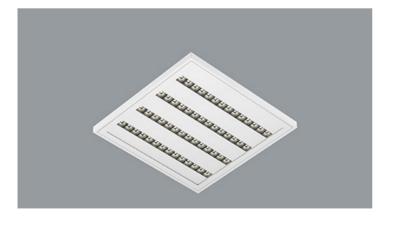


















Hauptparameter:

Туре	LED-Lichtstrom [lm]	Gesamtleistungsaufnahme [W]	Farbtemperatur [K]	Abmessungen A x B x H [mm]
DOMINO CLEAN SURFACE LOW UGR LED 6300 CRI>80	6801 / 7011	36,1	3000 / 4000	645 x 645 x 40
DOMINO CLEAN SURFACE LOW UGR LED 6300 CRI>90	5847 / 6030	36,1	3000 / 4000	645 x 645 x 40
DOMINO CLEAN SURFACE LOW UGR LED 8400 CRI>80	9068 / 9348	48,1	3000 / 4000	645 x 645 x 40
DOMINO CLEAN SURFACE LOW UGR LED 8400 CRI>90	7796 / 8040	48,1	3000 / 4000	645 x 645 x 40

Technische Zeichnung:



Produktmerkmale:

60
D) *

Produktmerkmale:

Montageart	Anbau an der Decke
Leuchtenkörper	Stahlblech
Leuchtenfarbe	RAL 9005 (schwarz) RAL 9006 (grau) RAL 9016 (weiß) *
Abdeckung	RASTER (Blendschutz)

Zusätzliche Informationen:

Die Leuchte kann in CLO-Ausführung hergestellt werden.

^{*} zur Auswahl