







DOMINO CLEAN SURFACE LOW UGR LED


Clean luminaires - surface

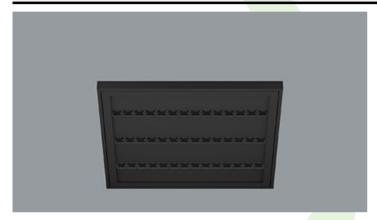



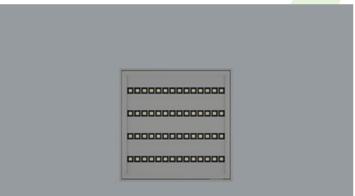

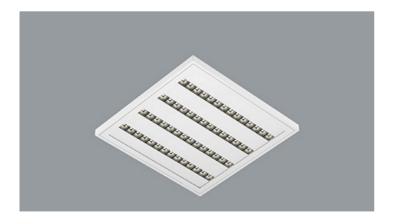

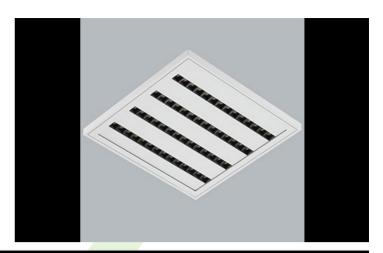


















Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
DOMINO CLEAN SURFACE LOW UGR LED 6300 CRI>80	6801 / 7011	36,1	3000 / 4000	645 x 645 x 40
DOMINO CLEAN SURFACE LOW UGR LED 6300 CRI>90	5847 / 6030	36,1	3000 / 4000	645 x 645 x 40
DOMINO CLEAN SURFACE LOW UGR LED 8400 CRI>80	9068 / 9348	48,1	3000 / 4000	645 x 645 x 40
DOMINO CLEAN SURFACE LOW UGR LED 8400 CRI>90	7796 / 8040	48,1	3000 / 4000	645 x 645 x 40

Technical drawing:



Light and electrical features:

Light source	LED	
Voltage	220240 V, 5060 Hz	
Lifetime of LED sources [h]	100000	
Lx/By	L80/B10	
CRI	>80/>90	
SDCM (LED sources)	3	
Photobiological risk class (IEC/EN 62471)	RG0	
Operating temperature range [°C]	5 ÷ 30	
Driver	standard on/off (E) DIM DALI (EDD) *	
Power factor cos φ	0,95	

^{*} Variant to specify when ordering

Mechanical features:

Assembly	surface mounted on ceiling
Material	steel sheet
Color	RAL 9005 (black) RAL 9006 (grey) RAL 9016 (white) *
Diffuser	RASTER (anti-glare louver)

Additional information:

The luminaire can be made in CLO version.