




DOUBLE SPHERE LED

Architectural luminaires







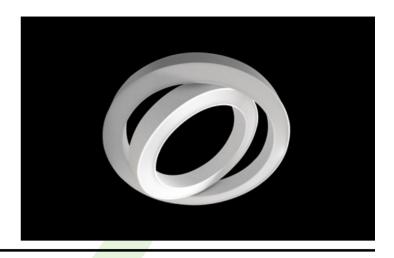

Round suspended luminaire equipped with highly efficient LED sources, designed for interiors with high stylistic requirements. The product consists of two glowing rings that can be adjusted relative to each other. Thanks to this, we obtain a very interesting effect. Dedicated application: representative room facilities such as halls, atria, receptions in shopping malls, museums, offices and many other public facilities.



Center of Non-invasive Medicine, Gdańsk

















Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions D x H [mm]
DOUBLE SPHERE LED	25168	213	3000	887 x 100

Technical drawing:





Light and electrical features:

Light source	LED	
Voltage	220240 V, 5060 Hz	
Lifetime of LED sources [h]	60000	
Lx/By	L80/B10	
CRI	>80	
SDCM (LED sources)	3	
Operating temperature range [°C]	5 ÷ 30	
Driver	standard on/off (E) DIM DALI (EDD) *	
Power factor cos φ	>0,95	

^{*} Variant to specify when ordering

Mechanical features:

Assembly	surface mounted on slings		
Material	aluminum		
Color	RAL 9016 (white)		
Diffuser	PLX (PMMA opal)		

Additional information:

The luminaire can be made in CLO version.