




## FASAD ODL04 LED

Outdoor luminaires

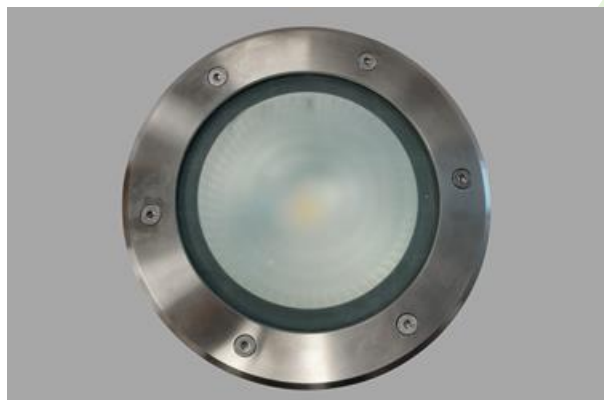

Suitable for ground installation. Pressure-injected aluminum die cast housing, corrosion- resisting, hardened glass diffuser of 10 mm thick, INOX stainless steel outer ring. Ring mounting to the housing is performed with the aid of stainless steel screws. Optic composes high level performance anodized aluminum. Silicone gaskets ensure life-span and exploitation. Luminaire delivered with mounting housing, included. The luminaire is equipped with a 3 x 1.5 mm<sup>2</sup> power wire with a length of 1.5 m. Resistance to static load 2000 kg. Luminaire recommended for architectural and natural objects.



"Artystyczny Żoliborz" residential, Warsaw



## Main parameters:

| Name                 | Luminous flux LED [lm] | Power of luminaire [W] | Color [K]   | Dimensions D x H [mm] |
|----------------------|------------------------|------------------------|-------------|-----------------------|
| FASAD ODL04 LED 2000 | 2335 / 2430            | 23                     | 3000 / 4000 | Ø220 x 300            |
| FASAD ODL04 LED 3000 | 3375 / 3505            | 28                     | 3000 / 4000 | Ø220 x 300            |

## Technical drawing:



## Light and electrical features:

|                                  |                       |
|----------------------------------|-----------------------|
| Light source                     | LED                   |
| Voltage                          | 220..240 V, 50..60 Hz |
| Lifetime of LED sources [h]      | 68000/76000           |
| Lx/By                            | L90/B10               |
| CRI                              | >80                   |
| SDCM (LED sources)               | 2                     |
| Operating temperature range [°C] | -25 ÷ 30              |
| Driver                           | standard on/off (E)   |
| Power factor cos φ               | >0,95                 |

## Mechanical features:

|          |  |
|----------|--|
| Assembly | into the ground  |
| Material | aluminum   |
| Color    | gray   |
| Diffuser | hardened transparent glass<br>SHM (hardened mat glass) |

Note: The power shown refers to the whole system (tolerance +/- 10%).  
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 02-07-2022