

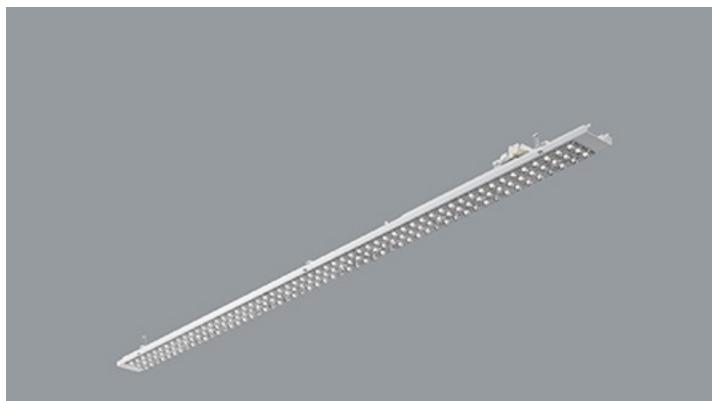


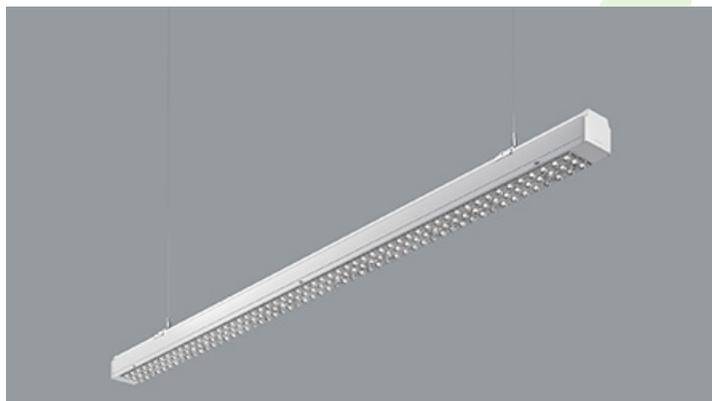

GRANVIA PRO

Industrial luminaires

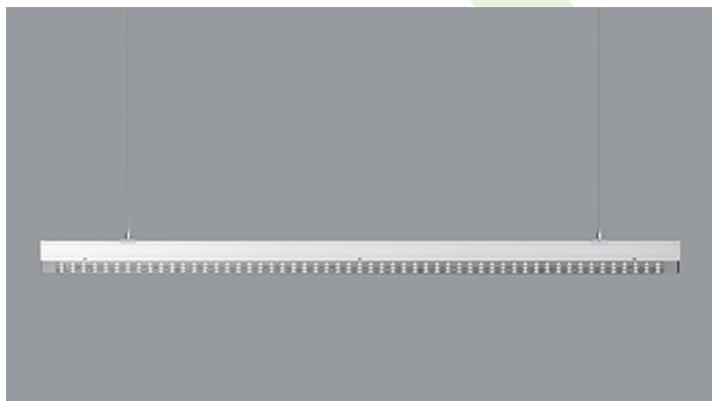

A cutting-edge energy-efficient linear luminaire, designed to deliver exceptional lighting performance for industrial, warehouse, and commercial spaces. With an impressive luminous efficiency up to 197 lm/W, this advanced lighting system ensures maximum performance while minimizing energy consumption. Installation is tool-less, making the process easy and quick, allowing you to create long lines of light with minimal effort. This luminaire is a perfect solution for supermarkets, large warehouses, and other retail and industrial spaces, offering efficient and sustainable illumination tailored to specific needs. Luminaire is available with 7 different light distributions, IP20 and IP54 version as well as with an option of customised body colour, colour temperature and CRI to match exact needs of most demanding projects.



Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
GRANVIA PRO 3500 IP20	3586,4 / 3775,2	19	3000 / 4000	900 x 72 x 66
GRANVIA PRO 4500 IP20	4457,9 / 4692,5	24	3000 / 4000	900 x 72 x 66
GRANVIA PRO 5500 IP20	5317,9 / 5597,7	29	3000 / 4000	900 x 72 x 66
GRANVIA PRO 6000 IP20	5977,3 / 6291,9	31,7	3000 / 4000	1500 x 72 x 66
GRANVIA PRO 6000 IP54	5977,3 / 6291,9	31,7	3000 / 4000	1500 x 72 x 66
GRANVIA PRO 6500 IP20	6165,7 / 6490,2	34,2	3000 / 4000	900 x 72 x 66
GRANVIA PRO 7500 IP20	7429,8 / 7820,8	39,9	3000 / 4000	1500 x 72 x 66
GRANVIA PRO 7500 L-900MM IP20	7413,1 / 7803,3	42	3000 / 4000	900 x 72 x 66
GRANVIA PRO 7500 IP54	7429,8 / 7820,8	39,9	3000 / 4000	1500 x 72 x 66
GRANVIA PRO 9000 L-1500MM IP20	8863,1 / 9329,6	48,4	3000 / 4000	1500 x 72 x 66
GRANVIA PRO 9000 L-2250MM IP20	8368,3 / 8808,7	44,3	3000 / 4000	2250 x 72 x 66
GRANVIA PRO 9000 L-900MM IP20	8629,2 / 9083,4	50,1	3000 / 4000	900 x 72 x 66
GRANVIA PRO 9000 L-1500MM IP54	8863,1 / 9329,6	48,4	3000 / 4000	1500 x 72 x 66
GRANVIA PRO 9000 L-2250MM IP54	8368,3 / 8808,7	44,3	3000 / 4000	2250 x 72 x 66
GRANVIA PRO 10500 IP20	10276,1 / 10817	56,9	3000 / 4000	1500 x 72 x 66
GRANVIA PRO 10500 L-900MM IP20	10197,9 / 10734,7	61,1	3000 / 4000	900 x 72 x 66
GRANVIA PRO 10500 IP54	10276,1 / 10817	56,9	3000 / 4000	1500 x 72 x 66
GRANVIA PRO 11000 IP20	10401,7 / 10949,1	55,9	3000 / 4000	2250 x 72 x 66
GRANVIA PRO 11000 IP54	10401,7 / 10949,1	55,9	3000 / 4000	2250 x 72 x 66
GRANVIA PRO 12000 IP20	11701,2 / 12317	72,5	3000 / 4000	900 x 72 x 66
GRANVIA PRO 13000 L-1500MM IP20	12355,2 / 13005,4	70	3000 / 4000	1500 x 72 x 66
GRANVIA PRO 13000 L-2250MM IP20	12408,3 / 13061,4	67,7	3000 / 4000	2250 x 72 x 66
GRANVIA PRO 13000 L-1500MM IP54	12355,2 / 13005,4	70	3000 / 4000	1500 x 72 x 66
GRANVIA PRO 13000 L-2250MM IP54	12408,3 / 13061,4	67,7	3000 / 4000	2250 x 72 x 66
GRANVIA PRO 15000 L-1500MM IP20	14382 / 15139	83,4	3000 / 4000	1500 x 72 x 66
GRANVIA PRO 15000 L-2250MM IP20	14386,6 / 15143,8	79,7	3000 / 4000	2250 x 72 x 66
GRANVIA PRO 15000 L-1500MM IP54	14382 / 15139	83,4	3000 / 4000	1500 x 72 x 66
GRANVIA PRO 15000 L-2250MM IP54	14386,6 / 15143,8	79,7	3000 / 4000	2250 x 72 x 66
GRANVIA PRO 17500 IP20	16996,5 / 17891,1	104	3000 / 4000	1500 x 72 x 66
GRANVIA PRO 17500 IP54	16996,5 / 17891,1	104	3000 / 4000	1500 x 72 x 66
GRANVIA PRO 18000 IP20	17297,2 / 18207,6	98	3000 / 4000	2250 x 72 x 66
GRANVIA PRO 18000 IP54	17297,2 / 18207,6	98	3000 / 4000	2250 x 72 x 66
GRANVIA PRO 20500 IP20	19501,9 / 20528,4	123,3	3000 / 4000	1500 x 72 x 66
GRANVIA PRO 20500 IP54	19501,9 / 20528,4	123,3	3000 / 4000	1500 x 72 x 66
GRANVIA PRO 21000 IP20	20134,8 / 21194,6	119,3	3000 / 4000	2250 x 72 x 66
GRANVIA PRO 21000 IP54	20134,8 / 21194,6	119,3	3000 / 4000	2250 x 72 x 66
GRANVIA PRO 25000 IP20	23795,1 / 25047,5	145,6	3000 / 4000	2250 x 72 x 66
GRANVIA PRO 25000 IP54	23795,1 / 25047,5	145,6	3000 / 4000	2250 x 72 x 66
GRANVIA PRO 28500 IP20	27302,7 / 28739,7	172,7	3000 / 4000	2250 x 72 x 66
GRANVIA PRO 28500 IP54	27302,7 / 28739,7	172,7	3000 / 4000	2250 x 72 x 66

Technical drawing:

□ ±
B

A

Light and electrical features:

Light source	LED
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Operating temperature range [°C]	-20 ÷ 35
Driver	standard on/off (E) DIM DALI (EDD) *
Power factor cos φ	>0,95

* Variant to specify when ordering

Mechanical features:

Assembly	directly mounted to ceiling construction or surface mounted on slings
Material	steel sheet
Color	RAL 9016 (white)
Diffuser	optical system based on PMMA lenses



Note: The power shown refers to the whole system (tolerance +/- 10%).
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 17-04-2026