

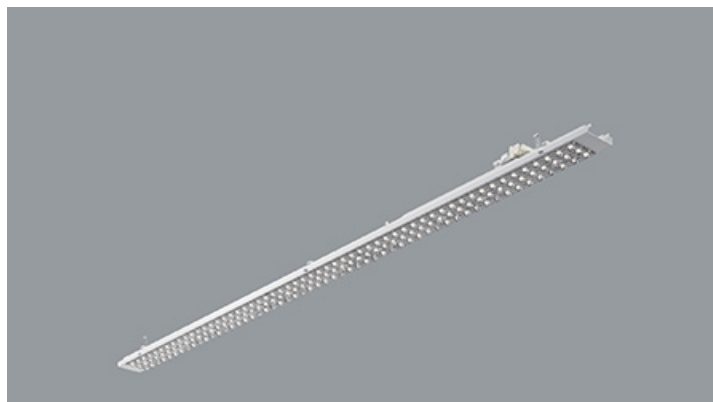


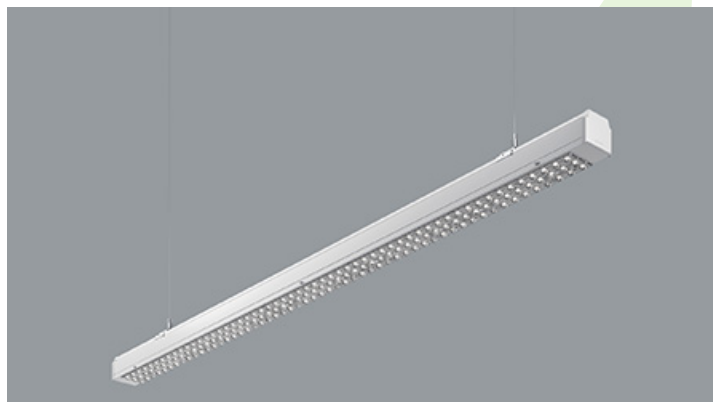

## GRANVIA PRO

### Industrial luminaires

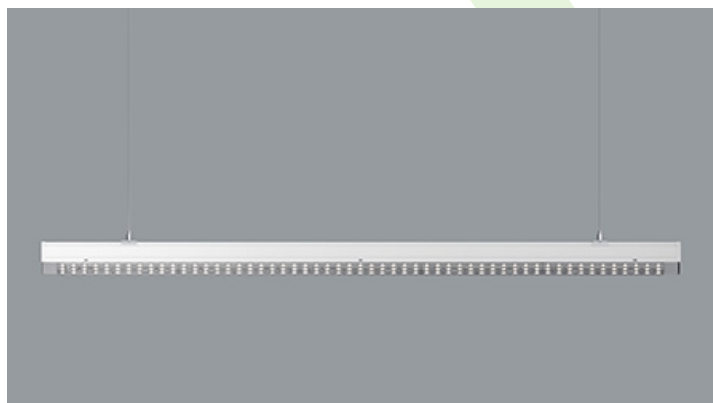

A cutting-edge energy-efficient linear luminaire, designed to deliver exceptional lighting performance for industrial, warehouse, and commercial spaces. With an impressive luminous efficiency up to 197 lm/W, this advanced lighting system ensures maximum performance while minimizing energy consumption. Installation is tool-less, making the process easy and quick, allowing you to create long lines of light with minimal effort. This luminaire is a perfect solution for supermarkets, large warehouses, and other retail and industrial spaces, offering efficient and sustainable illumination tailored to specific needs. Luminaire is available with 7 different light distributions, IP20 and IP54 version as well as with an option of customised body colour, colour temperature and CRI to match exact needs of most demanding projects.




## Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
GRANVIA PRO 6000 IP20	5977,3 / 6291,9	31,7	3000 / 4000	1500 x 72 x 66
GRANVIA PRO 7500 IP20	7429,8 / 7820,8	39,9	3000 / 4000	1500 x 72 x 66
GRANVIA PRO 9000 L-1500MM IP20	8863,1 / 9329,6	48,4	3000 / 4000	1500 x 72 x 66
GRANVIA PRO 10500 IP20	10276,1 / 10817	56,9	3000 / 4000	1500 x 72 x 66
GRANVIA PRO 13000 L-1500MM IP20	12355,2 / 13005,4	70	3000 / 4000	1500 x 72 x 66
GRANVIA PRO 15000 L-1500MM IP20	14382 / 15139	83,4	3000 / 4000	1500 x 72 x 66
GRANVIA PRO 17500 IP20	16996,5 / 17891,1	104	3000 / 4000	1500 x 72 x 66
GRANVIA PRO 20500 IP20	19501,9 / 20528,4	123,3	3000 / 4000	1500 x 72 x 66
GRANVIA PRO 9000 L-2250MM IP20	8368,3 / 8808,7	44,3	3000 / 4000	2250 x 72 x 66
GRANVIA PRO 11000 IP20	10401,7 / 10949,1	55,9	3000 / 4000	2250 x 72 x 66
GRANVIA PRO 13000 L-2250MM IP20	12408,3 / 13061,4	67,7	3000 / 4000	2250 x 72 x 66
GRANVIA PRO 15000 L-2250MM IP20	14386,6 / 15143,8	79,7	3000 / 4000	2250 x 72 x 66
GRANVIA PRO 18000 IP20	17297,2 / 18207,6	98	3000 / 4000	2250 x 72 x 66
GRANVIA PRO 21000 IP20	20134,8 / 21194,6	119,3	3000 / 4000	2250 x 72 x 66
GRANVIA PRO 25000 IP20	23795,1 / 25047,5	145,6	3000 / 4000	2250 x 72 x 66
GRANVIA PRO 28500 IP20	27302,7 / 28739,7	172,7	3000 / 4000	2250 x 72 x 66
GRANVIA PRO 6000 IP54	5977,3 / 6291,9	31,7	3000 / 4000	1500 x 72 x 66
GRANVIA PRO 7500 IP54	7429,8 / 7820,8	39,9	3000 / 4000	1500 x 72 x 66
GRANVIA PRO 9000 L-1500MM IP54	8863,1 / 9329,6	48,4	3000 / 4000	1500 x 72 x 66
GRANVIA PRO 10500 IP54	10276,1 / 10817	56,9	3000 / 4000	1500 x 72 x 66
GRANVIA PRO 13000 L-1500MM IP54	12355,2 / 13005,4	70	3000 / 4000	1500 x 72 x 66
GRANVIA PRO 15000 L-1500MM IP54	14382 / 15139	83,4	3000 / 4000	1500 x 72 x 66
GRANVIA PRO 17500 IP54	16996,5 / 17891,1	104	3000 / 4000	1500 x 72 x 66
GRANVIA PRO 20500 IP54	19501,9 / 20528,4	123,3	3000 / 4000	1500 x 72 x 66
GRANVIA PRO 9000 L-2250MM IP54	8368,3 / 8808,7	44,3	3000 / 4000	2250 x 72 x 66
GRANVIA PRO 11000 IP54	10401,7 / 10949,1	55,9	3000 / 4000	2250 x 72 x 66
GRANVIA PRO 13000 L-2250MM IP54	12408,3 / 13061,4	67,7	3000 / 4000	2250 x 72 x 66
GRANVIA PRO 15000 L-2250MM IP54	14386,6 / 15143,8	79,7	3000 / 4000	2250 x 72 x 66
GRANVIA PRO 18000 IP54	17297,2 / 18207,6	98	3000 / 4000	2250 x 72 x 66
GRANVIA PRO 21000 IP54	20134,8 / 21194,6	119,3	3000 / 4000	2250 x 72 x 66
GRANVIA PRO 25000 IP54	23795,1 / 25047,5	145,6	3000 / 4000	2250 x 72 x 66
GRANVIA PRO 28500 IP54	27302,7 / 28739,7	172,7	3000 / 4000	2250 x 72 x 66

## Technical drawing:

□ ±  
B



## Light and electrical features:

<b>Light source</b>	LED
<b>Voltage</b>	220..240 V, 50..60 Hz
<b>Lifetime of LED sources [h]</b>	100000
<b>Lx/By</b>	L80/B10
<b>CRI</b>	>80
<b>SDCM (LED sources)</b>	3
<b>Photobiological risk class (IEC/EN 62471)</b>	RG0
<b>Operating temperature range [°C]</b>	-20 ÷ 35
<b>Driver</b>	standard on/off (E) DIM DALI (EDD) *
<b>Power factor cos φ</b>	>0,95

\* Variant to specify when ordering

## Mechanical features:

<b>Assembly</b>	directly mounted to ceiling construction or surface mounted on slings
<b>Material</b>	steel sheet
<b>Color</b>	RAL 9016 (white)
<b>Diffuser</b>	optical system based on PMMA lenses



Note: The power shown refers to the whole system (tolerance +/- 10%).  
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 13-12-2024