

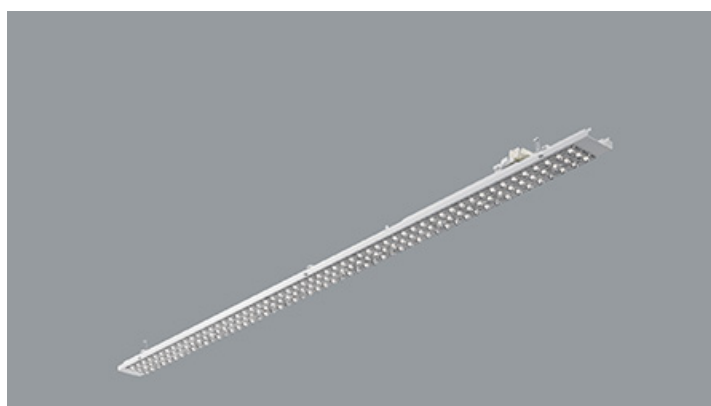


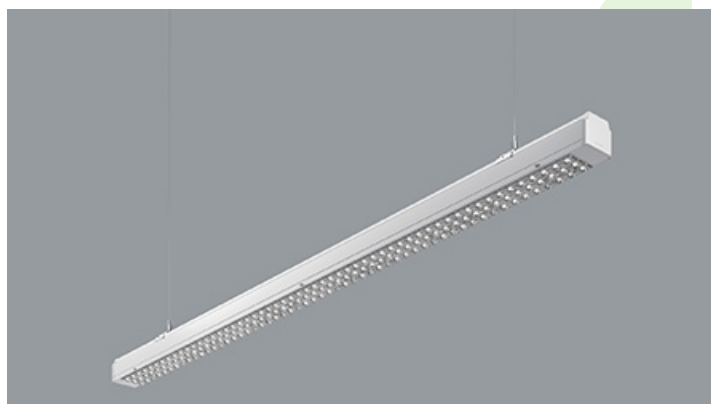

GRANVIA

Industrial luminaires

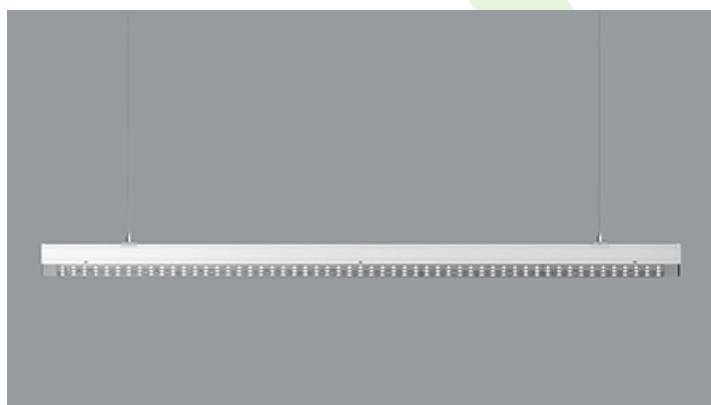

A cutting-edge energy-efficient linear luminaire, designed to deliver exceptional lighting performance for industrial, warehouse, and commercial spaces. With an impressive luminous efficiency up to 197 lm/W, this advanced lighting system ensures maximum performance while minimizing energy consumption. Installation is tool-less, making the process easy and quick, allowing you to create long lines of light with minimal effort. This luminaire is a perfect solution for supermarkets, large warehouses, and other retail and industrial spaces, offering efficient and sustainable illumination tailored to specific needs. Luminaire is available with 7 different light distributions, IP20 and IP54 version as well as with an option of customised body colour, colour temperature and CRI to match exact needs of most demanding projects.



Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
GRANVIA 6000 IP20	5936,7 / 6215,4	31,7	3000 / 4000	1500 x 72 x 66
GRANVIA 7500 IP20	7379 / 7726,9	40,1	3000 / 4000	1500 x 72 x 66
GRANVIA 9000 IP20	8772,4 / 9187,8	48,4	3000 / 4000	1500 x 72 x 66
GRANVIA 10000 IP20	10169,8 / 10653,4	57	3000 / 4000	1500 x 72 x 66
GRANVIA 12500 L-1500MM IP20	12203,8 / 12788	70,1	3000 / 4000	1500 x 72 x 66
GRANVIA 15000 IP20	14131,6 / 14812,7	83,3	3000 / 4000	1500 x 72 x 66
GRANVIA 8500 IP20	8311,3 / 8701,6	44,4	3000 / 4000	2250 x 72 x 66
GRANVIA 10500 IP20	10330,5 / 10817,6	56,1	3000 / 4000	2250 x 72 x 66
GRANVIA 12500 L-2250MM IP20	12281,4 / 12862,9	67,7	3000 / 4000	2250 x 72 x 66
GRANVIA 14500 IP20	14237,8 / 14914,7	79,8	3000 / 4000	2250 x 72 x 66
GRANVIA 17500 IP20	17085,4 / 17903,2	98,2	3000 / 4000	2250 x 72 x 66
GRANVIA 20500 IP20	19784,2 / 20737,8	119,1	3000 / 4000	2250 x 72 x 66
GRANVIA 6000 IP54	5936,7 / 6215,4	31,7	3000 / 4000	1500 x 72 x 66
GRANVIA 7500 IP54	7379 / 7726,9	40,1	3000 / 4000	1500 x 72 x 66
GRANVIA 9000 IP54	8772,4 / 9187,8	48,4	3000 / 4000	1500 x 72 x 66
GRANVIA 10000 IP54	10169,8 / 10653,4	57	3000 / 4000	1500 x 72 x 66
GRANVIA 12500 L-1500MM IP54	12203,8 / 12788	70,1	3000 / 4000	1500 x 72 x 66
GRANVIA 15000 IP54	14131,6 / 14812,7	83,3	3000 / 4000	1500 x 72 x 66
GRANVIA 8500 IP54	8311,3 / 8701,6	44,4	3000 / 4000	2250 x 72 x 66
GRANVIA 10500 IP54	10330,5 / 10817,6	56,1	3000 / 4000	2250 x 72 x 66
GRANVIA 12500 L-2250MM IP54	12281,4 / 12862,9	67,7	3000 / 4000	2250 x 72 x 66
GRANVIA 14500 IP54	14237,8 / 14914,7	79,8	3000 / 4000	2250 x 72 x 66
GRANVIA 17500 IP54	17085,4 / 17903,2	98,2	3000 / 4000	2250 x 72 x 66
GRANVIA 20500 IP54	19784,2 / 20737,8	119,1	3000 / 4000	2250 x 72 x 66

Technical drawing:

□ ±

B



A

Light and electrical features:

Light source	LED
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	90000
Lx/By	L80/B10
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Operating temperature range [°C]	-20 ÷ 35
Driver	standard on/off (E) DIM DALI (EDD) *
Power factor cos φ	>0,95

* Variant to specify when ordering

Mechanical features:

Assembly	directly mounted to ceiling construction or surface mounted on slings
Material	steel sheet
Color	RAL 9016 (white)
Diffuser	optical system based on PMMA lenses



Note: The power shown refers to the whole system (tolerance +/- 10%).
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 07-11-2024