




## KUBIK WALL ECO LED IP20

Architectural luminaires

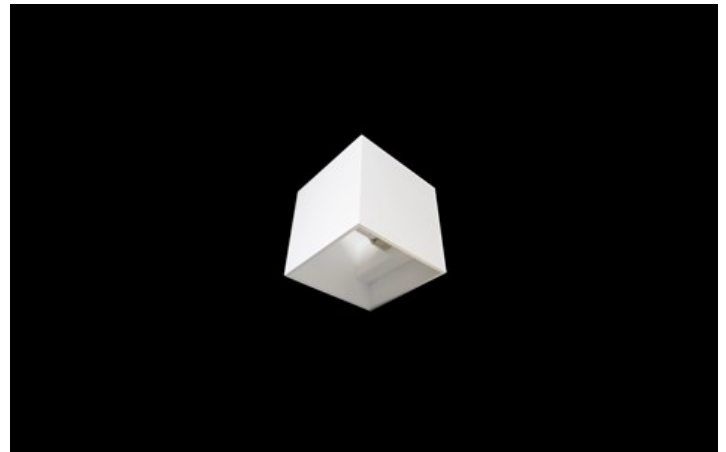


Luminaire for interchangeable LED sources (called retrofit) with a G9 base. The body is made of aluminum. The open design provides very easy access to the source and its replacement, and very easy mounting on the wall as well. Simple construction giving an interesting light effect. Recommended for decorative lighting of passages, corridors or staircases.



## Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
KUBIK WALL ECO LED UP&DOWN IP20	depending on source	depending on source	depending on source	120 x 120 x 120

## Technical drawing:



## Light and electrical features:

Light source	RETROFIT G9 (not included)
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	depending on source
Lx/By	depending on source
CRI	depending on source
SDCM (LED sources)	depending on source
Driver	none

\* Variant to specify when ordering

## Mechanical features:

Assembly	mounted on wall
Material	aluminum
Color	RAL 9005 (black) RAL 9016 (white) *
Diffuser	none

## Additional information:

LED light source maximum diameter - 18 mm.