





### **KUBIK CEILING SLIM LED**

#### **Outdoor luminaires**







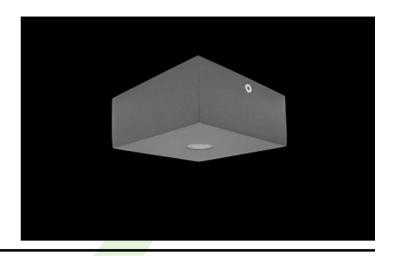

An outdoor fitting designed for ceiling mounting. The body is made of aluminum. Energy-efficient fitting made of component parts produced by renowned companies. Ergonomic shapes of the fitting enable the application of the Kubik-type fitting almost in every building. The assembly is very easy. Level of protection against penetration of dust and water - IP65. Kubik Ceiling Slim LED luminaire relative to the standard version has a smaller height. Kubik Ceiling Slim LED is more slim, and thus stands out from the ceiling for only 5 cm.















#### Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
KUBIK CEILING SLIM LED 1X1,7W 24°	152	3	4000	100 x 100 x 50
KUBIK CEILING SLIM LED 1X2,4W 24°	187	4	4000	100 x 100 x 50

# **Technical drawing:**



# Light and electrical features:

Light source	LED		
Voltage	220240 V, 5060 Hz		
Lifetime of LED sources [h]	50000		
Lx/By	L70/B50		
CRI	>80		
Operating temperature range [°C]	-25 ÷ 30		
Driver standard on/off (I			
Power factor cos φ	>0,5		

<sup>\*</sup> Variant to specify when ordering

## **Mechanical features:**

Assembly	surface mounted on ceiling
Material	aluminum
Color	RAL 9005 (black) RAL 9006 (grey, metallic, fine structure) RAL 7016 (anthracite, metallic, fine structure) RAL 9016 (white) *
Diffuser	transparent polycarbonate