







KUBIK POLE SOFT 100 LED

Outdoor luminaires








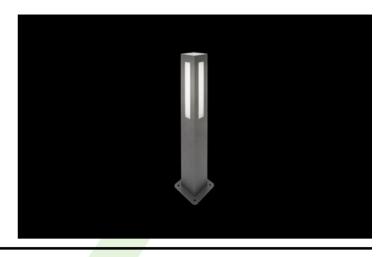

Outer luminary to be mounted on a solid surface (concrete, sett, or substructure) equipped with highly efficient energy saving LED sources of the newest generation. Luminary dedicated to illuminate pedestrians routes such as park alleys, parking site passages, property entrances. Its body made from aluminum (profile size 100x100mm) which is coated by the facade powder used for outdoor activities. PLX opal diffuser

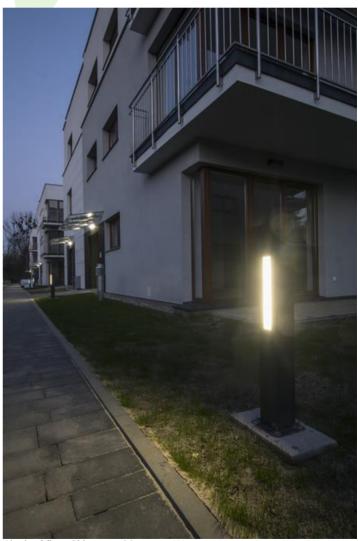

Block of flats Sklepowa 22 street, Warsaw















Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
KUBIK POLE SOFT 100 LED 3S 3300	3309	21	4000	160 x 160 x 750
KUBIK POLE SOFT 100 LED 4S 4400	4565	24,7	4000	160 x 160 x 750

Technical drawing:



Light and electrical features:

Light source	LED		
Voltage	220240 V, 5060 Hz		
Lifetime of LED sources [h]	60000		
Lx/By	L80/B10		
CRI	>80		
SDCM (LED sources)	3		
Operating temperature range [°C]	-25 ÷ 30		
Driver	standard on/off (E)		
Power factor cos φ	>0,95		

Mechanical features:

Assembly	for the ground
Material	aluminum
Color	RAL 9007 (dark grey, metallic, fine structure)
Diffuser	PMMA opal