

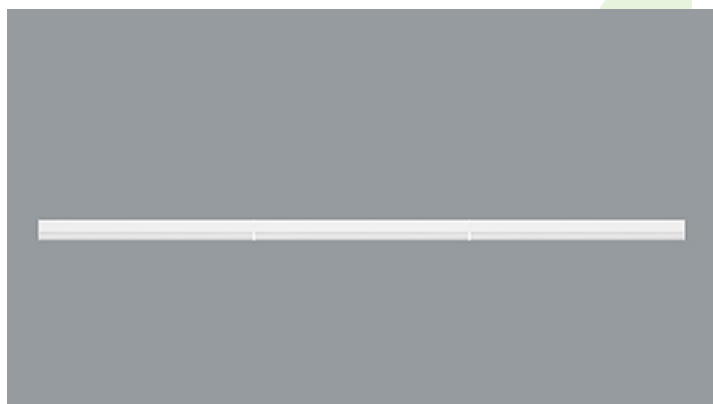


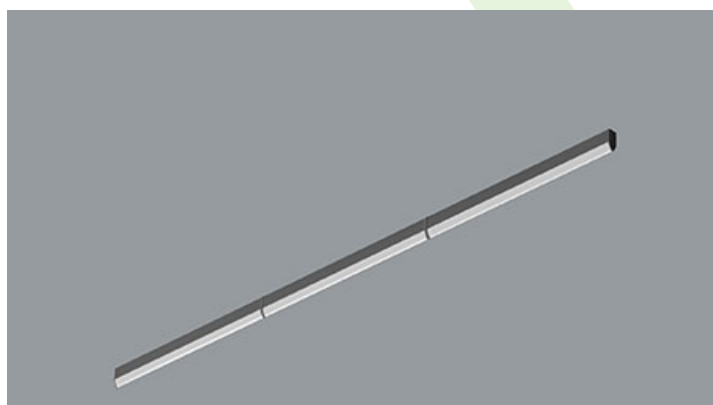

## LAMINAR SURFACE LED LINE

Surface mounted luminaires

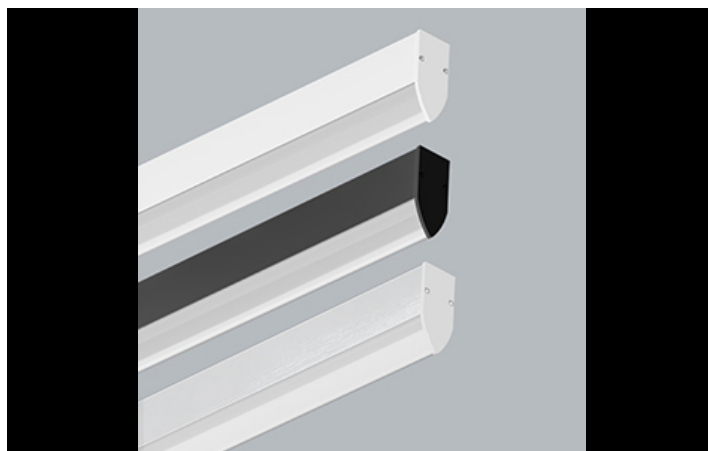


LAMINAR SURFACE LED LINE is a linear lighting system for spaces requiring laminar airflow. Its streamlined, oval shape minimizes airflow resistance in controlled clean, and medical environments. Designed for quick and easy installation, LAMINAR SURFACE LED LINE features a "click-in" system with end caps enabling tool-free mechanical and electrical connection, allowing for the fast creation of continuous light lines. The spring-mounted installation eliminates the need to open the luminaire, simplifying the process and reducing installation time. Constructed from durable aluminum, LAMINAR SURFACE LED LINE includes a opal polycarbonate diffuser resistant to mechanical damage, ensuring uniform, glare-free illumination. High-efficiency LED modules are available in 3000 K or 4000 K colour temperatures, with a CRI>80.



**Main parameters:**

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
LAMINAR SURFACE LED 2600 LINE-EL	2538 / 2671,7	14	3000 / 4000	1143 x 48 x110
LAMINAR SURFACE LED 2600 LINE-EP	2538 / 2671,7	14	3000 / 4000	1143 x 48 x110
LAMINAR SURFACE LED 2600 LINE-S	2538 / 2671,7	14	3000 / 4000	1145 x 48 x110
LAMINAR SURFACE LED 4400 LINE-EL	4441,7 / 4675,5	24,5	3000 / 4000	1143 x 48 x110
LAMINAR SURFACE LED 4400 LINE-EP	4441,7 / 4675,5	24,5	3000 / 4000	1143 x 48 x110
LAMINAR SURFACE LED 4400 LINE-S	4441,7 / 4675,5	24,5	3000 / 4000	1145 x 48 x110

**Technical drawing:**



B

## Light and electrical features:

<b>Light source</b>	LED
<b>Voltage</b>	220..240 V, 50..60 Hz
<b>Lifetime of LED sources [h]</b>	100000
<b>Lx/By</b>	L80/B10
<b>CRI</b>	>80
<b>SDCM (LED sources)</b>	3
<b>Photobiological risk class (IEC/EN 62471)</b>	RG0
<b>Operating temperature range [°C]</b>	5 ÷ 30
<b>Driver</b>	standard on/off (E) DIM DALI (EDD) *
<b>Power factor cos φ</b>	>0,95

\* Variant to specify when ordering

## Mechanical features:

<b>Assembly</b>	surface mounted on ceiling
<b>Material</b>	aluminum
<b>Color</b>	RAL 9005 (black) anodised aluminum RAL 9016 (white) *
<b>Diffuser</b>	PC (opalescent polycarbonate)



Note: The power shown refers to the whole system (tolerance +/- 10%).  
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 17-04-2026