




LUXWALL LED

Outdoor luminaires

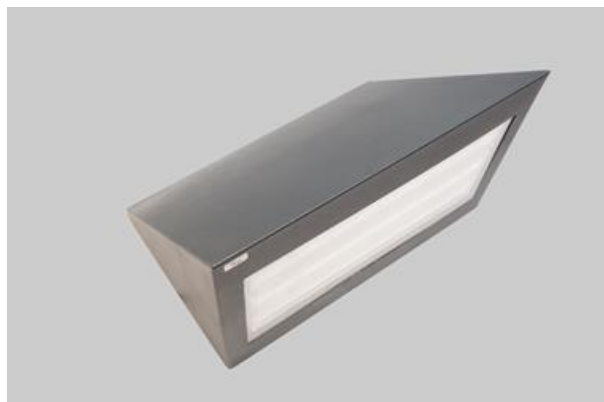

An outdoor fitting made for illuminating building facades and creating lighting effects. The body is made of aluminum painted with special facade paint which is resistant to bad weather conditions. Energy-efficient fitting made of component parts produced by renowned companies. The fitting is featured by a high level of protection against the penetration of solids and water: IP65, which renders the fitting an interesting decorative solution highlighting the architecture of an illuminated building.




RSM Praga – Osowskiego Street 11, Warsaw



Main parameters:

| Name | Luminous flux LED [lm] | Power of luminaire [W] | Color [K] | Dimensions A x B x H [mm] |
|------------------|------------------------|------------------------|-------------|---------------------------|
| LUXWALL LED 3300 | 3316 / 3436 | 19,2 | 3000 / 4000 | 360 x 240 x 220 |

Technical drawing:



Light and electrical features:

| | |
|----------------------------------|---|
| Light source | LED |
| Voltage | 220..240 V, 50..60 Hz |
| Lifetime of LED sources [h] | 60000 |
| Lx/By | L80/B10 |
| CRI | >80 |
| SDCM (LED sources) | 3 |
| Operating temperature range [°C] | -25 ÷ 30 |
| Driver | standard on/off (E) DIM DALI (EDD) * |
| Power factor cos φ | >0,95 |

* Variant to specify when ordering

Mechanical features:

| | |
|----------|---|
| Assembly | mounted on wall |
| Material | aluminum |
| Color | RAL 7016 (anthracite, metallic, fine structure) RAL 9016 (white) * |
| Diffuser | PC-T (transparent polycarbonate) |

Additional information:

The luminaire can be made in CLO version.

Note: The power shown refers to the whole system (tolerance +/- 10%).
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 16-12-2025