




METEOR LED COMPACT

Compact



Surface mounted luminaires equipped with highly efficient LED sources. Luminaire base made from powder coated steel sheet. Lampshade made from the opal version of methyl polymethacrylate. Luminaire mounted directly on ceilings by raw plugs.

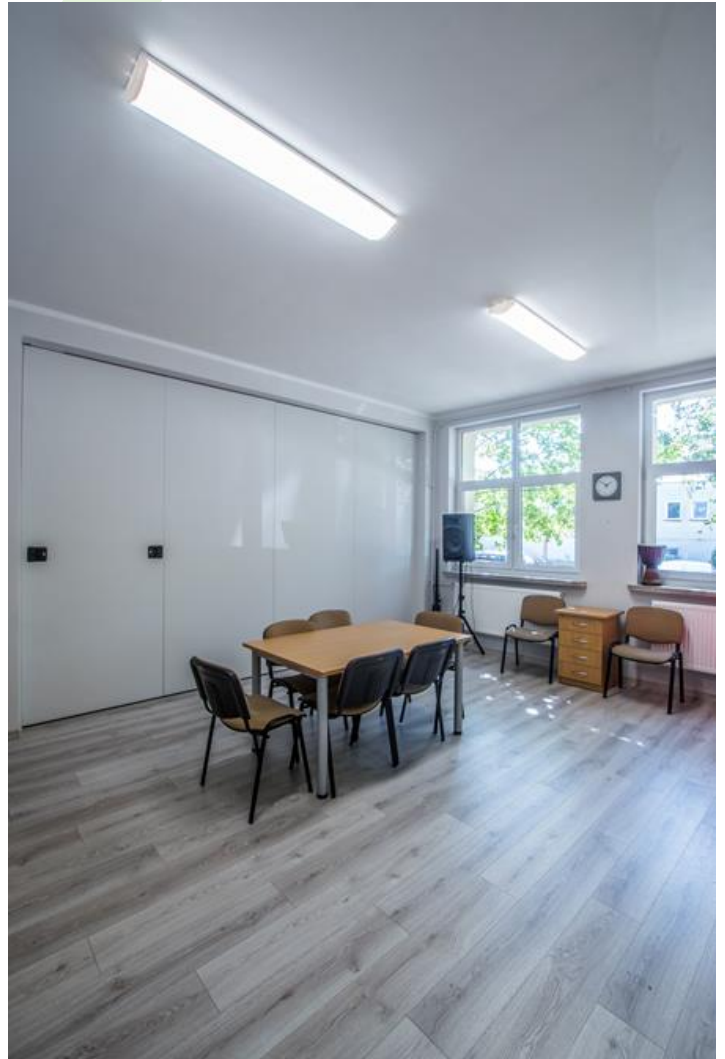


Environmental House of self-help, Białystok



Main parameters:

| Name | Luminous flux LED [lm] | Power of luminaire [W] | Color [K] | Dimensions A x B x H [mm] |
|------------------------------|------------------------|------------------------|-------------|---------------------------|
| METEOR LED COMPACT 4000 | 4280,2 / 4458,5 | 24,7 | 3000 / 4000 | 1255 x 207 x 71 |
| METEOR LED COMPACT 6000 | 6126,6 / 6381,8 | 37,7 | 3000 / 4000 | 1255 x 207 x 71 |
| METEOR LED COMPACT 8000 | 8560 / 8918 | 49,3 | 3000 / 4000 | 1255 x 207 x 71 |
| METEOR LED COMPACT 4000 IP44 | 4280,2 / 4458,5 | 24,7 | 3000 / 4000 | 1255 x 207 x 71 |
| METEOR LED COMPACT 6000 IP44 | 6126,6 / 6381,8 | 37,7 | 3000 / 4000 | 1255 x 207 x 71 |
| METEOR LED COMPACT 8000 IP44 | 8560 / 8918 | 49,3 | 3000 / 4000 | 1255 x 207 x 71 |

Technical drawing:



Light and electrical features:

| | |
|--|---|
| Light source | LED |
| Voltage | 220..240 V, 50..60 Hz |
| Lifetime of LED sources [h] | 100000 |
| Lx/By | L80/B10 |
| CRI | >80 |
| SDCM (LED sources) | 3 |
| Photobiological risk class (IEC/EN 62471) | RG0 |
| Operating temperature range [°C] | -20 ÷ 35 |
| Driver | standard on/off (E) DIM DALI (EDD) * |
| Power factor cos φ | >0,95 |

* Variant to specify when ordering

Mechanical features:

| | |
|-----------------|----------------------------|
| Assembly | surface mounted on ceiling |
| Material | steel sheet |
| Color | RAL 9016 (white) |
| Diffuser | PMMA opal |



Note: The power shown refers to the whole system (tolerance +/- 10%).
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 17-04-2026