

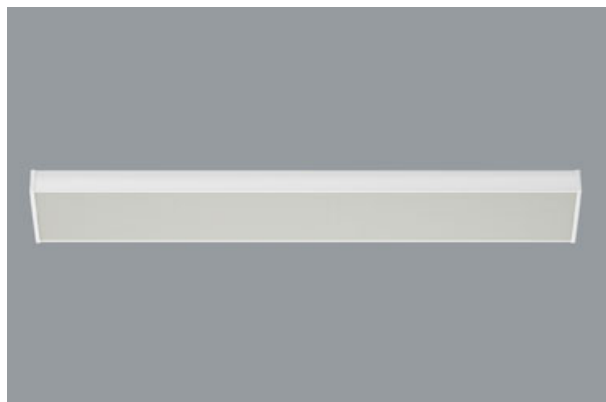


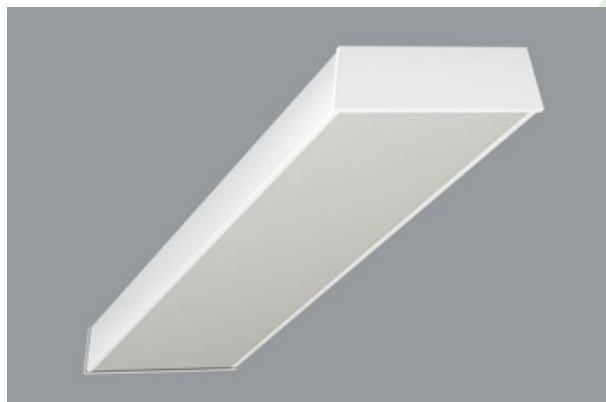

METEOR V2 LED COMPACT

Compact

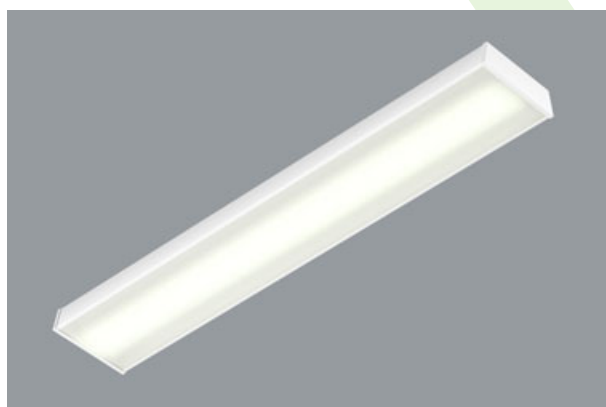


Surface mounted luminaires equipped with highly efficient LED sources. Luminary base made from powder coated steel sheet. Luminaire diffuser made of polymethylmethacrylate in a smooth opal or microprismatic version. Luminary mounted directly on ceilings by raw plugs.



Main parameters:

| Name | Luminous flux LED [lm] | Power of luminaire [W] | Color [K] | Dimensions A x B x H [mm] |
|-----------------------------|---------------------------------------------|------------------------|-------------|----------------------------------|
| METEOR V2 LED COMPACT 2600 | 2752 / 2864 | 15,9 | 3000 / 4000 | 1203 x 209 x 64 |
| METEOR V2 LED COMPACT 3000 | 3008,2 / 3056,5 | 19,3 | 3000 / 4000 | 620 x 209 x 64 |
| METEOR V2 LED COMPACT 4000 | 4280 / 4280,2 / 4446 / 4458,5 / 4459 / 4634 | 24,9 / 26,9 | 3000 / 4000 | 1203 x 209 x 64 / 620 x 209 x 64 |
| METEOR V2 LED COMPACT 5000 | 5350 / 5573,8 | 31,1 | 3000 / 4000 | 1460 x 209 x 64 |
| METEOR V2 LED COMPACT 6000 | 6126,6 / 6127 / 6381,8 / 6382 | 38 | 3000 / 4000 | 1203 x 209 x 64 |
| METEOR V2 LED COMPACT 7000 | 6919 / 7206 | 42 | 3000 / 4000 | 1460 x 209 x 64 |
| METEOR V2 LED COMPACT 8000 | 8560 / 8918 | 49,7 | 3000 / 4000 | 1203 x 209 x 64 |
| METEOR V2 LED COMPACT 10000 | 10700 / 11148 | 62,3 | 3000 / 4000 | 1460 x 209 x 64 |

Technical drawing:



Light and electrical features:

| | |
|----------------------------------|-----------------------------------------|
| Light source | LED |
| Voltage | 220..240 V, 50..60 Hz |
| Lifetime of LED sources [h] | 90000 |
| Lx/By | L80/B10 |
| CRI | >80 |
| SDCM (LED sources) | 3 |
| Operating temperature range [°C] | 5 ÷ 35 |
| Driver | standard on/off (E) DIM DALI (EDD) * |
| Power factor cos φ | >0,95 |

* Variant to specify when ordering

Mechanical features:

| | |
|----------|--------------------------------------------------------------|
| Assembly | surface mounted on ceiling |
| Material | steel sheet |
| Color | RAL 9005 (black) RAL 9006 (grey) RAL 9016 (white) * |
| Diffuser | PLX (PMMA opal) Micro-PRM (micro-prismatic diffuser PMMA) |

Note: The power shown refers to the whole system (tolerance +/- 10%).
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 21-11-2024