

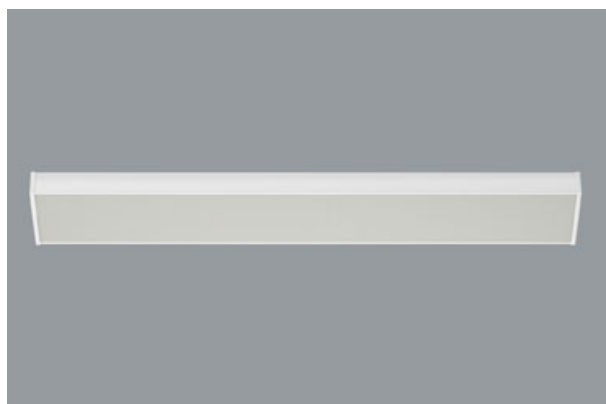


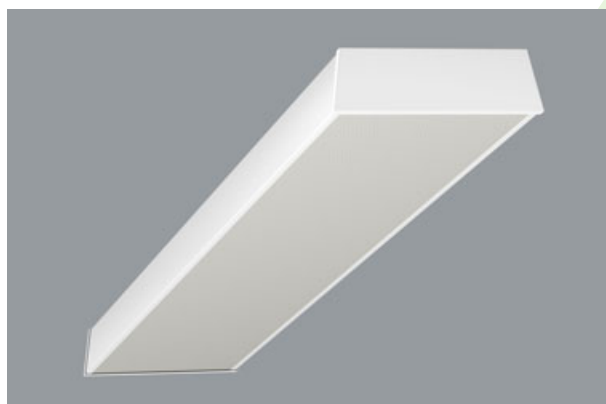

## METEOR V2 LED COMPACT

Compact

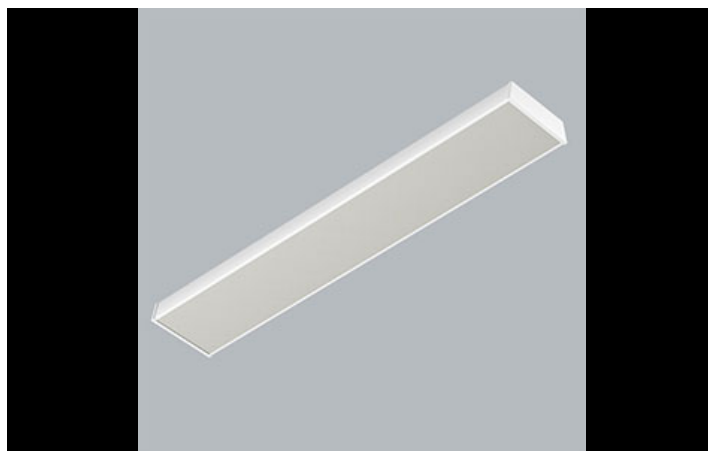


Surface mounted luminaires equipped with highly efficient LED sources. Luminary base made from powder coated steel sheet. Luminaire diffuser made of polymethylmethacrylate in a smooth opal or microprismatic version. Luminary mounted directly on ceilings by raw plugs.



## Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
METEOR V2 LED COMPACT 2600	2752 / 2864	15,9	3000 / 4000	1203 x 209 x 64
METEOR V2 LED COMPACT 3000	3008,2 / 3056,5	19,3	3000 / 4000	620 x 209 x 64
METEOR V2 LED COMPACT 4000	4280 / 4280,2 / 4446 / 4458,5 / 4459 / 4634	24,9 / 26,9	3000 / 4000	1203 x 209 x 64 / 620 x 209 x 64
METEOR V2 LED COMPACT 5000	5350 / 5573,8	31,1	3000 / 4000	1460 x 209 x 64
METEOR V2 LED COMPACT 6000	6126,6 / 6127 / 6381,8 / 6382	38	3000 / 4000	1203 x 209 x 64
METEOR V2 LED COMPACT 7000	6919 / 7206	42	3000 / 4000	1460 x 209 x 64
METEOR V2 LED COMPACT 8000	8560 / 8918	49,7	3000 / 4000	1203 x 209 x 64
METEOR V2 LED COMPACT 10000	10700 / 11148	62,3	3000 / 4000	1460 x 209 x 64

## Technical drawing:



## Light and electrical features:

Light source	LED
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	90000
Lx/By	L80/B10
CRI	>80
SDCM (LED sources)	3
Operating temperature range [°C]	5 ÷ 35
Driver	standard on/off (E) DIM DALI (EDD) *
Power factor cos φ	>0,95

\* Variant to specify when ordering

## Mechanical features:

Assembly	surface mounted on ceiling
Material	steel sheet
Color	RAL 9005 (black) RAL 9006 (grey) RAL 9016 (white) *
Diffuser	PLX (PMMA opal) Micro-PRM (micro-prismatic diffuser PMMA)

Note: The power shown refers to the whole system (tolerance +/- 10%).  
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 13-12-2024