

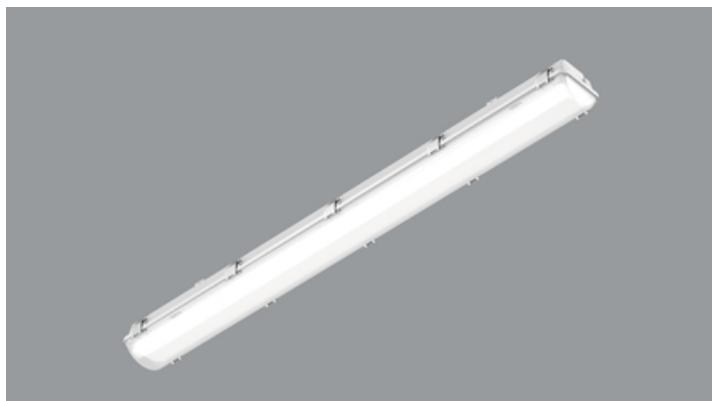


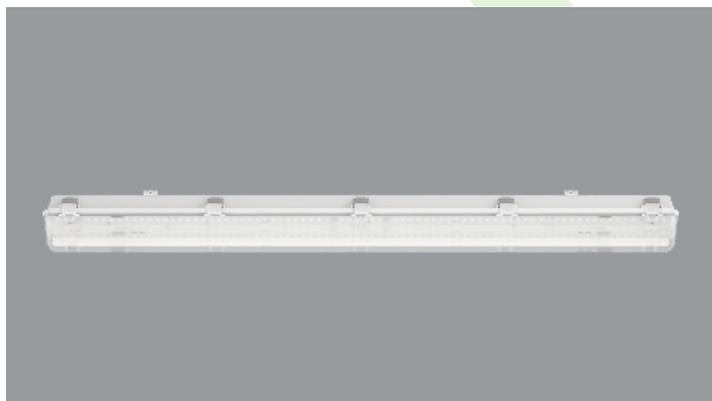

## NEPTUN INDUSTRY LED HT60

Industrial luminaires

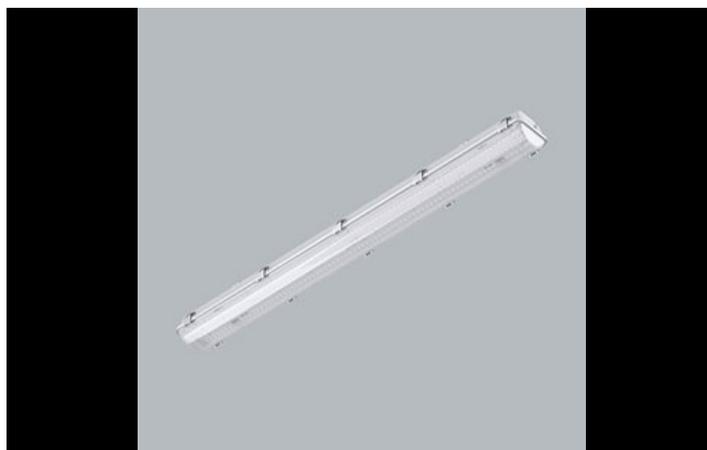


Tightly-closed ceiling luminaires with highly efficient LED light sources, ensuring additional protection against solid body penetration and jet of water from all directions. Perfect to be installed in moist and dusty rooms. The luminaire is characterized by compact size and unbelievably simple and quick way to install comparing with similar products. The color temperature for applied LED light sources is 3000/4000 K. Color rendering index  $Ra > 80$ . Luminaire designed for industrial facilities, for ambient temperatures up to  $+60^{\circ}\text{C}$ . Luminaire clips made of steel.



## Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
NEPTUN INDUSTRY LED 5000	4985,2 / 5268,3	27,8	3000 / 4000	1163 x 115 x 110
NEPTUN INDUSTRY LED 5000 ZASILANIE PRZELOTOWE 16A	4985,2 / 5268,3	27,8	3000 / 4000	1163 x 115 x 110
NEPTUN INDUSTRY LED 7000	6231,5 / 6585,4	34,8	3000 / 4000	1563 x 115 x 110
NEPTUN INDUSTRY LED 7000 ZASILANIE PRZELOTOWE 16A	6231,5 / 6585,4	34,8	3000 / 4000	1563 x 115 x 110
NEPTUN INDUSTRY LED 10000	9970 / 10536	55,6	3000 / 4000	1163 x 115 x 110
NEPTUN INDUSTRY LED 10000 ZASILANIE PRZELOTOWE 16A	9970 / 10536	55,6	3000 / 4000	1163 x 115 x 110
NEPTUN INDUSTRY LED 13000	12462 / 13170	69,6	3000 / 4000	1563 x 115 x 110
NEPTUN INDUSTRY LED 13000 ZASILANIE PRZELOTOWE 16A	12462 / 13170	69,6	3000 / 4000	1563 x 115 x 110
NEPTUN INDUSTRY LED 15000	14214 / 15024	77,7	3000 / 4000	1563 x 115 x 110
NEPTUN INDUSTRY LED 15000 ZASILANIE PRZELOTOWE 16A	14214 / 15024	77,7	3000 / 4000	1563 x 115 x 110

## Technical drawing:

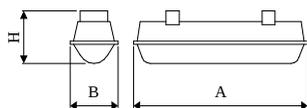

## Light and electrical features:

Light source	LED
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	60000
Lx/By	L80/B10
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Operating temperature range [°C]	-40 ÷ 60
Driver	standard on/off (E) DIM DALI (EDD) *
Power factor cos $\varphi$	>0,95

\* Variant to specify when ordering

## Mechanical features:

Assembly	directly mounted to ceiling construction or surface mounted on slings
Material	polycarbonate
Color	RAL 9006 (grey)
Diffuser	PC (opalescent polycarbonate)

## Additional information:

Possibility of using looping through power supply 16 A.

Note: The power shown refers to the whole system (tolerance +/- 10%).  
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 17-04-2026