

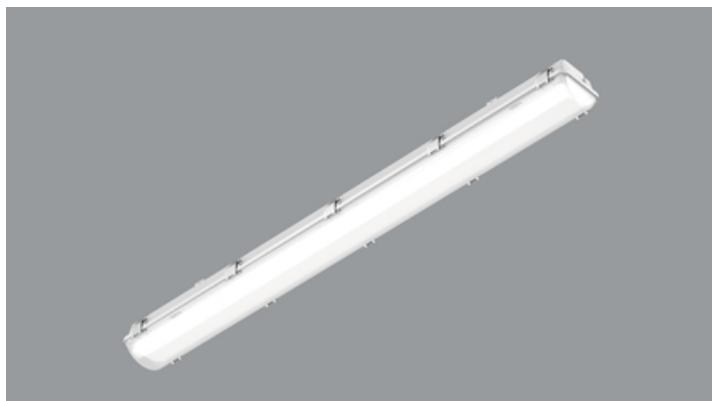


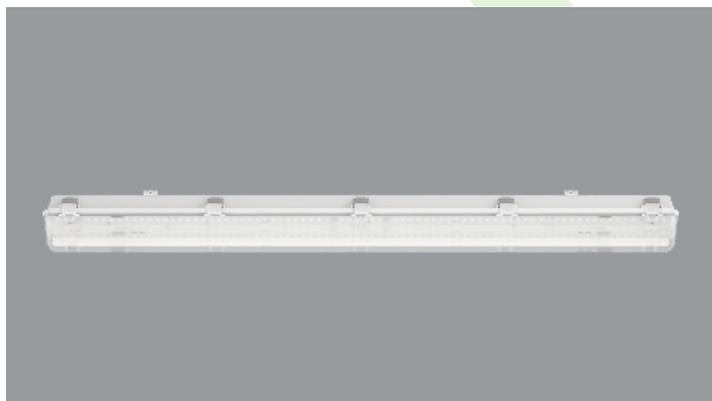

NEPTUN INDUSTRY LED

Industrial luminaires

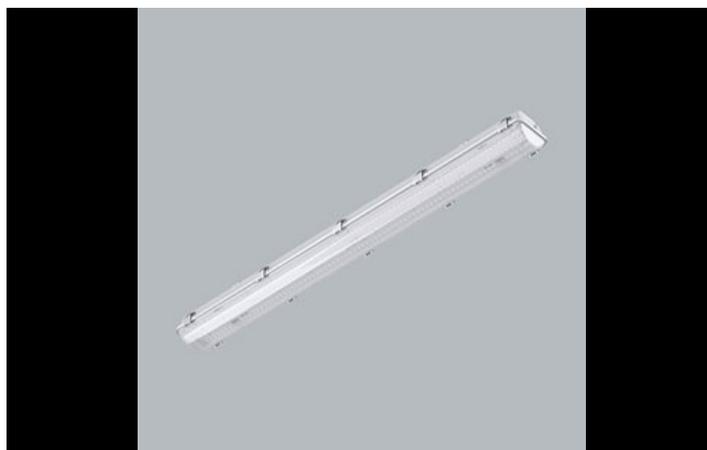


Tightly-closed ceiling luminaires with highly efficient LED light sources, ensuring additional protection against solid body penetration and jet of water from all directions. Perfect to be installed in moist and dusty rooms. The luminaire is characterized by compact size and unbelievably simple and quick way to install comparing with similar products. The color temperature for applied LED light sources is 3000/4000 K. Color rendering index $Ra > 80$. Luminaire designed for industrial facilities. Luminaire clips made of steel.



Main parameters:

| Name | Luminous flux LED [lm] | Power of luminaire [W] | Color [K] | Dimensions A x B x H [mm] |
|--|------------------------|------------------------|-------------|---------------------------|
| NEPTUN INDUSTRY LED 8000 | 7700,9 / 8138 | 45,2 | 3000 / 4000 | 1163 x 115 x 110 |
| NEPTUN INDUSTRY LED 8000 ZASILANIE PRZELOTOWE 16A | 7700,9 / 8138 | 45,2 | 3000 / 4000 | 1163 x 115 x 110 |
| NEPTUN INDUSTRY LED 9000 | 9079,5 / 9594,8 | 52,8 | 3000 / 4000 | 1563 x 115 x 110 |
| NEPTUN INDUSTRY LED 9000 ZASILANIE PRZELOTOWE 16A | 9079,5 / 9594,8 | 52,8 | 3000 / 4000 | 1563 x 115 x 110 |
| NEPTUN INDUSTRY LED 16000 | 15402 / 16276 | 90,4 | 3000 / 4000 | 1163 x 115 x 110 |
| NEPTUN INDUSTRY LED 16000 ZASILANIE PRZELOTOWE 16A | 15402 / 16276 | 90,4 | 3000 / 4000 | 1163 x 115 x 110 |
| NEPTUN INDUSTRY LED 19000 | 18158 / 19190 | 105,6 | 3000 / 4000 | 1563 x 115 x 110 |
| NEPTUN INDUSTRY LED 19000 ZASILANIE PRZELOTOWE 16A | 18158 / 19190 | 105,6 | 3000 / 4000 | 1563 x 115 x 110 |
| NEPTUN INDUSTRY LED 24000 | 23037 / 24345 | 131 | 3000 / 4000 | 1563 x 115 x 110 |
| NEPTUN INDUSTRY LED 24000 ZASILANIE PRZELOTOWE 16A | 23037 / 24345 | 131 | 3000 / 4000 | 1563 x 115 x 110 |

Technical drawing:

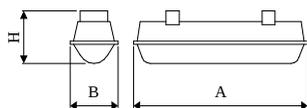

Light and electrical features:

| | |
|---|---|
| Light source | LED |
| Voltage | 220..240 V, 50..60 Hz |
| Lifetime of LED sources [h] | 60000 |
| Lx/By | L80/B10 |
| CRI | >80 |
| SDCM (LED sources) | 3 |
| Photobiological risk class (IEC/EN 62471) | RG0 |
| Operating temperature range [°C] | -40 ÷ 35 |
| Driver | standard on/off (E) DIM DALI (EDD) * |
| Power factor cos φ | >0,95 |

* Variant to specify when ordering

Mechanical features:

| | |
|----------|--|
| Assembly | directly mounted to ceiling construction or surface mounted on slings |
| Material | polycarbonate |
| Color | RAL 9006 (grey) |
| Diffuser | PC (opalescent polycarbonate) |

Additional information:

Possibility of using looping through power supply 16 A.