




PAREO COMPACT

Compact

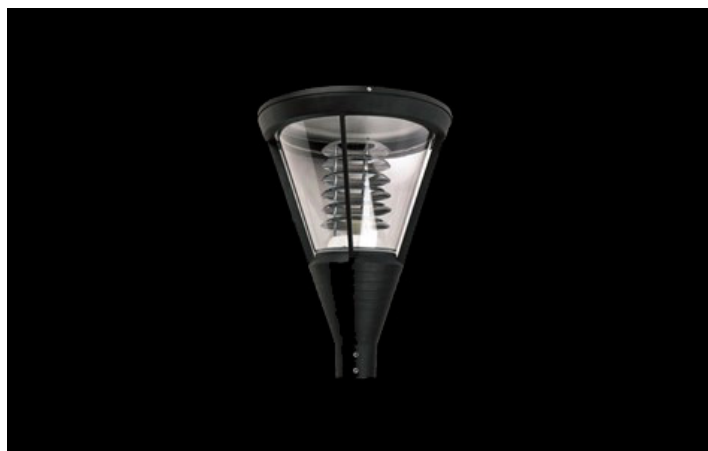

Park and garden dedicated luminaire for lamps of general use on the popular E27 base. Body made of die cast aluminum. Light source shielded by aluminum raster glare limiting. Polycarbonate outer coat with high degree of mechanical factors resistance. Outer coat ensures high weather conditions resistance. It gives aesthetic look for whole time of exploitation. PAREO is especially recommended to illuminate squares, circuses, parks and open spaces.




"Jardin Bemowo" residential, Warsaw



Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions D x H [mm]
PAREO COMPACT	depending on applied light source	depending on applied light source	depending on applied light source	Ø440 x 630

Technical drawing:



Light and electrical features:

Light source	RETROFIT E27 (not included)
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	depending on applied light source
Lx/By	depending on applied light source
CRI	depending on applied light source
SDCM (LED sources)	depending on applied light source
Operating temperature range [°C]	
Driver	none
Power factor cos φ	>0,95

Mechanical features:

Assembly	mounted on poles
Material	aluminum
Color	RAL 9005 (black)
Diffuser	transparent polycarbonate

Note: The power shown refers to the whole system (tolerance +/- 10%).
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 13-12-2024