



PAREO LED

Outdoor luminaires










Outdoor luminary dedicated for garden and parks, equipped with highly efficient LED sources. Body made from aluminum cast. Its transparent diffuser is made from polycarbonate which is highly resistant to mechanical factors – IKO9. The outer cover provides a very high level of resistance to all atmospheric factors, as well as the luminary aesthetical design during the whole exploitation process (IP54). Mounting diameter – 76 mm. Luminary specially recommended to illuminate the squares, parks, and other open spaces.

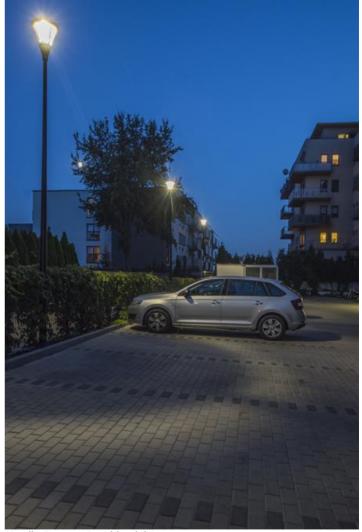

"Jardin Bemowo" residential, Warsaw















Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions D x H [mm]
PAREO LED 3000	4002	27	5000	Ø440 x 630
PAREO LED 5000	6003	41	5000	Ø440 x 630

Technical drawing:



Light and electrical features:

Light source	LED
Voltage	220240 V, 5060 Hz
Lifetime of LED sources [h]	76000/83000
Lx/By	L90/B10
CRI	>80
SDCM (LED sources)	2
Operating temperature range [°C]	-25 ÷ 30
Driver	standard on/off (E)
Power factor cos φ	>0,9

Mechanical features:

Assembly	mounted on poles	
Material	aluminum	
Color	black	
Diffuser	transparent polycarbonate	