



PAREO ONE LED

Outdoor luminaires




Modernistic park and garden luminaire. Body made of cast aluminium. Transparent diffuser made of hardened glass. External coating provides high level of resistance to all weather conditions and aesthetic appearance of the luminaire during the whole lifetime (IP66 rating). The diameter of the fitting is 78 mm. The luminaire is especially recommended for squares, parks, open spaces.



Main parameters:

| Name | Luminous flux LED [lm] | Power of luminaire [W] | Color [K] | Dimensions D x H [mm] |
|--------------------|------------------------|------------------------|-------------|-----------------------|
| PAREO ONE LED 2000 | 2409 / 2440 | 12,1 | 3000 / 4000 | Ø490 x 560 |
| PAREO ONE LED 3000 | 3324 / 3392 | 18,1 | 3000 / 4000 | Ø490 x 560 |
| PAREO ONE LED 4000 | 4523 / 4615 | 26 | 3000 / 4000 | Ø490 x 560 |
| PAREO ONE LED 6000 | 6418 / 6549 | 40,5 | 3000 / 4000 | Ø490 x 560 |

Technical drawing:

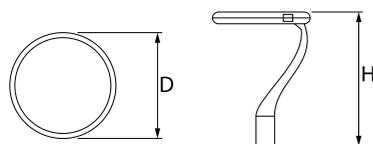


Light and electrical features:

| | |
|---|-----------------------|
| Light source | LED |
| Voltage | 220..240 V, 50..60 Hz |
| Lifetime of LED sources [h] | 100000 |
| Lx/By | L80/B10 |
| CRI | >70 |
| Operating temperature range [°C] | -40 ÷ 40 |
| Driver | standard on/off (E) |
| Power factor cos φ | >0,9 |

Mechanical features:

| | |
|-----------------|----------------------------|
| Assembly | mounted on poles |
| Material | aluminum |
| Color | RAL 9007 (dark grey) |
| Diffuser | hardened transparent glass |



Note: The power shown refers to the whole system (tolerance +/- 10%).
 The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).
 Technical data may be changed. Photos of the luminaires may differ from reality.
 Date of last update: 18-05-2026