




PLAFOND SQUARE LED

Surface mounted luminaires

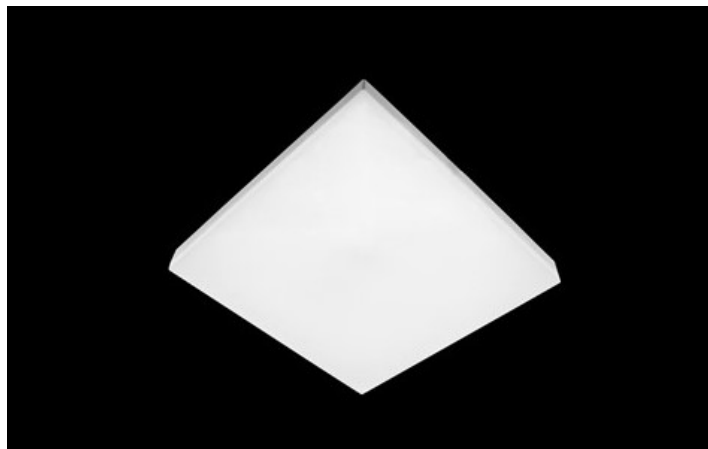


Surface mounted or wall luminary equipped in highly efficient LED panels. Luminary body and diffuser made from IK10 impact resistant material.



Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
PLAFOND SQUARE LED 1300	1653	14	4000	280 x 280 x 63
PLAFOND SQUARE LED 2000	2598	23	4000	280 x 280 x 63
PLAFOND SQUARE LED 2500	3044	28	4000	280 x 280 x 63

Technical drawing:

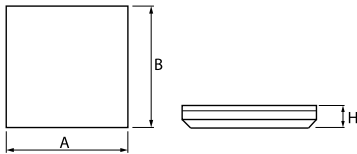

Light and electrical features:

Light source	LED
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	54000
Lx/By	L90
CRI	>80
SDCM (LED sources)	3
Operating temperature range [°C]	0 ÷ 40
Driver	standard on/off (E)

Mechanical features:

Assembly	surface mounted on ceiling or on wall
Material	polycarbonate
Color	white
Diffuser	PC (opalescent polycarbonate)

Additional information:

The luminaire can be equipped with a microwave motion sensor.

Note: The power shown refers to the whole system (tolerance +/- 10%).
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 24-04-2024