







#### **RUBIN CLEAN-ECO LED CRI95**


#### Clean luminaires CRI95

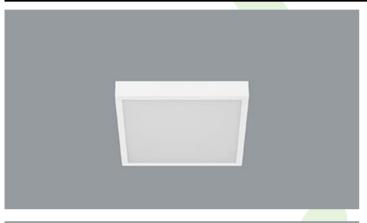

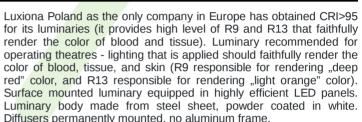

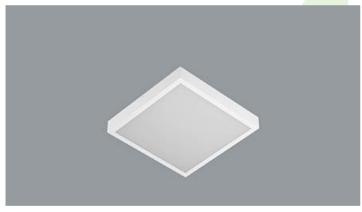

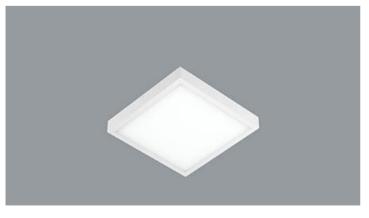

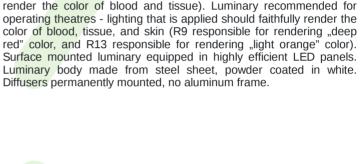


















## **Main parameters:**

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
RUBIN CLEAN-ECO LED CRI95 5400	5964,5 / 6213	40,7	3000 / 4000	620 x 620 x 85
RUBIN CLEAN-ECO LED CRI95 7200	7952,6 / 8284	54,2	3000 / 4000	620 x 620 x 85
RUBIN CLEAN-ECO LED CRI95 9000	9940,8 / 10355	67,8	3000 / 4000	620 x 620 x 85

## **Technical drawing:**



# Light and electrical features:

Light source	LED	
Voltage	220240 V, 5060 Hz	
Lifetime of LED sources [h]	80000	
Lx/By	L80/B10	
CRI	>90	
SDCM (LED sources)	3	
Photobiological risk class (IEC/EN 62471)	RG0	
Operating temperature range [°C]	5 ÷ 30	
Driver	standard on/off (E) DIM DALI (EDD) *	
Power factor cos φ	0,95	

<sup>\*</sup> Variant to specify when ordering

### **Mechanical features:**

Assembly	surface mounted on ceiling
Material	steel sheet
Color	RAL 9016 (white)
Diffuser	Micro-PRM (micro-prismatic diffuser PMMA) Micro-PRM SH (micro-prismatic diffuser PMMA with hardened glass) PLX (PMMA opal) SHM (hardened mat glass)