







#### **RUBIN CLEAN-ECO LED**

Clean luminaires - surface

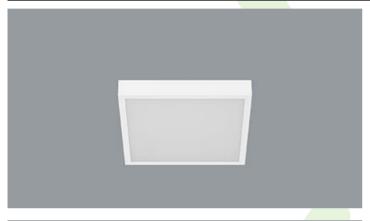



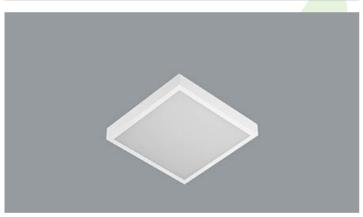

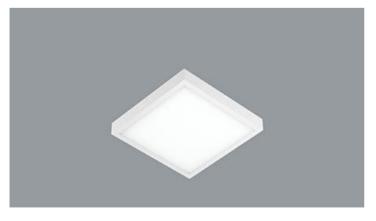


















#### **Main parameters:**

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
RUBIN CLEAN-ECO LED 3900	3807,2 / 4007,5	20,8	3000 / 4000	620 x 620 x 85
RUBIN CLEAN-ECO LED 5200	5076,2 / 5343,4	27,8	3000 / 4000	620 x 620 x 85
RUBIN CLEAN-ECO LED 6500	6345,3 / 6679,2	34,7	3000 / 4000	620 x 620 x 85
RUBIN CLEAN-ECO LED 6600	6662,5 / 7013,2	36,6	3000 / 4000	620 x 620 x 85
RUBIN CLEAN-ECO LED 8800	8883,4 / 9350,9	48,8	3000 / 4000	620 x 620 x 85
RUBIN CLEAN-ECO LED 11000	11104,2 / 11688,7	61	3000 / 4000	620 x 620 x 85

## **Technical drawing:**



# **Light and electrical features:**

Light source	LED	
Voltage	220240 V, 5060 Hz	
Lifetime of LED sources [h]	100000	
Lx/By	L80/B10	
CRI	>80	
SDCM (LED sources)	3	
Photobiological risk class (IEC/EN 62471)	RG0	
Operating temperature range [°C]	5 ÷ 30	
Driver	standard on/off (E) DIM DALI (EDD) *	
Power factor cos φ	0,95	

<sup>\*</sup> Variant to specify when ordering

## **Mechanical features:**

Assembly	surface mounted on ceiling
Material	steel sheet
Color	RAL 9016 (white)
Diffuser	Micro-PRM (micro-prismatic diffuser PMMA) Micro-PRM SH (micro-prismatic diffuser PMMA with hardened glass) PLX (PMMA opal) SHM (hardened mat glass)