

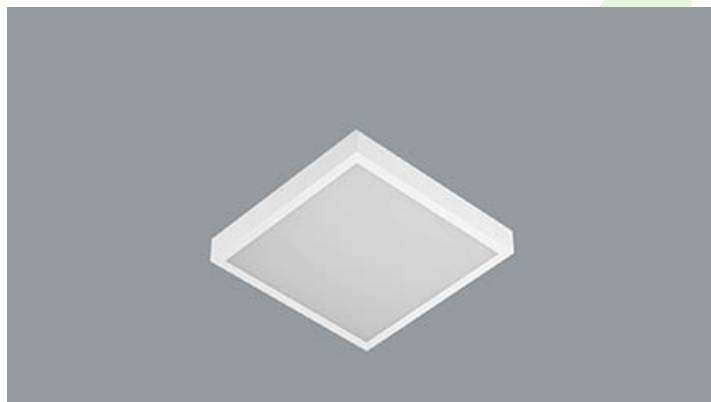


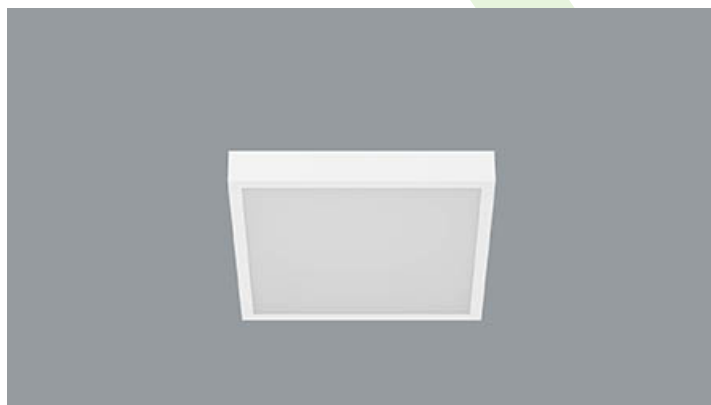

## RUBIN CLEAN-ECO LED

Clean luminaires - surface

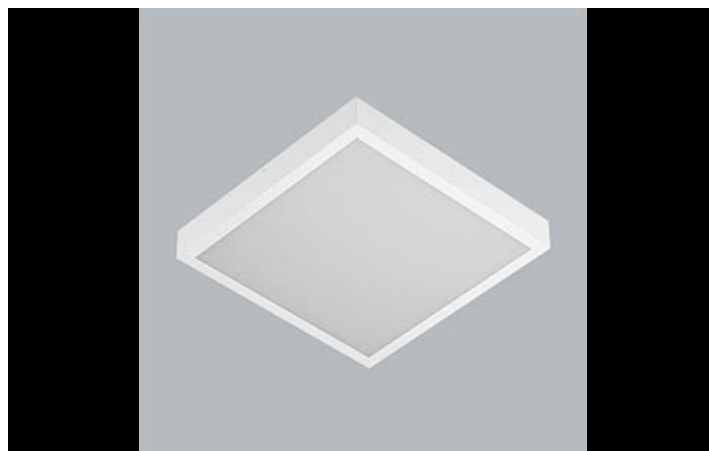


Surface mounted luminaire equipped in highly efficient LED panels. Luminary body made from steel sheet, powder coated in white. Diffusers permanently mounted, no aluminum frame. Luminary recommended for: emergency departments, intensive care units, and treatment rooms.



Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
RUBIN CLEAN-ECO LED 3900	3807,2 / 4007,5	20,8	3000 / 4000	620 x 620 x 85
RUBIN CLEAN-ECO LED 5200	5076,2 / 5343,4	27,8	3000 / 4000	620 x 620 x 85
RUBIN CLEAN-ECO LED 6500	6345,3 / 6679,2	34,7	3000 / 4000	620 x 620 x 85
RUBIN CLEAN-ECO LED 6600	6662,5 / 7013,2	36,6	3000 / 4000	620 x 620 x 85
RUBIN CLEAN-ECO LED 8800	8883,4 / 9350,9	48,8	3000 / 4000	620 x 620 x 85
RUBIN CLEAN-ECO LED 11000	11104,2 / 11688,7	61	3000 / 4000	620 x 620 x 85

Technical drawing:



Light and electrical features:

Light source	LED
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
CRI	>80
SDCM (LED sources)	3
Photobiological risk class (IEC/EN 62471)	RG0
Operating temperature range [°C]	5 ÷ 30
Driver	standard on/off (E) DIM DALI (EDD) *
Power factor cos φ	0,95

\* Variant to specify when ordering

Mechanical features:

Assembly	surface mounted on ceiling
Material	steel sheet
Color	RAL 9016 (white)
Diffuser	Micro-PRM (micro-prismatic diffuser PMMA) Micro-PRM SH (micro-prismatic diffuser PMMA with hardened glass) PLX (PMMA opal) SHM (hardened mat glass)

Note: The power shown refers to the whole system (tolerance +/- 10%).  
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 01-08-2025