



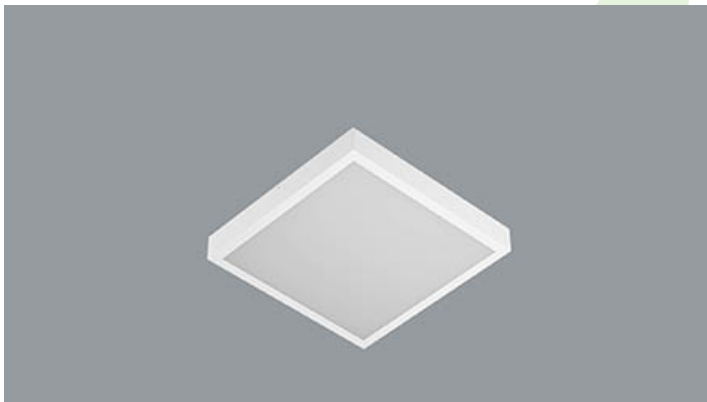

## RUBIN CLEAN-ECO LED

Clean luminaires - surface

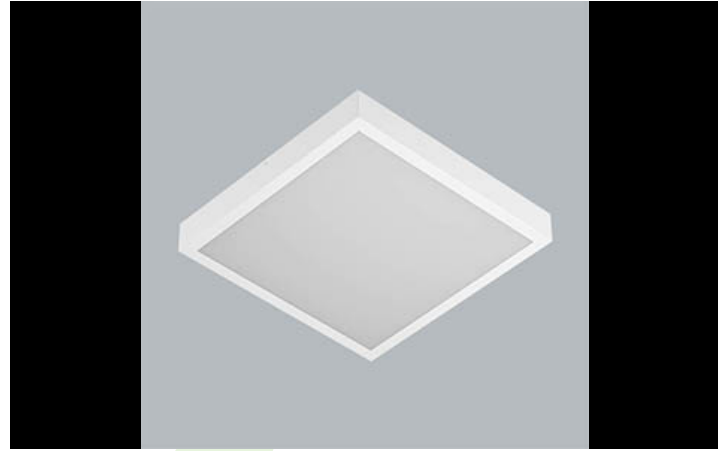


Surface mounted luminaire equipped in highly efficient LED panels. Luminary body made from steel sheet, powder coated in white. Diffusers permanently mounted, no aluminum frame. Luminary recommended for: emergency departments, intensive care units, and treatment rooms.



**Main parameters:**

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
RUBIN CLEAN-ECO LED 3900	3807,2 / 4007,5	20,8	3000 / 4000	620 x 620 x 85
RUBIN CLEAN-ECO LED 5200	5076,2 / 5343,4	27,8	3000 / 4000	620 x 620 x 85
RUBIN CLEAN-ECO LED 6500	6345,3 / 6679,2	34,7	3000 / 4000	620 x 620 x 85
RUBIN CLEAN-ECO LED 6600	6662,5 / 7013,2	36,6	3000 / 4000	620 x 620 x 85
RUBIN CLEAN-ECO LED 8800	8883,4 / 9350,9	48,8	3000 / 4000	620 x 620 x 85
RUBIN CLEAN-ECO LED 11000	11104,2 / 11688,7	61	3000 / 4000	620 x 620 x 85

**Technical drawing:**



## Light and electrical features:

<b>Light source</b>	LED
<b>Voltage</b>	220..240 V, 50..60 Hz
<b>Lifetime of LED sources [h]</b>	100000
<b>Lx/By</b>	L80/B10
<b>CRI</b>	>80
<b>SDCM (LED sources)</b>	3
<b>Photobiological risk class (IEC/EN 62471)</b>	RG0
<b>Operating temperature range [°C]</b>	5 ÷ 30
<b>Driver</b>	standard on/off (E) DIM DALI (EDD) *
<b>Power factor cos φ</b>	0,95

\* Variant to specify when ordering

## Mechanical features:

<b>Assembly</b>	surface mounted on ceiling
<b>Material</b>	steel sheet
<b>Color</b>	RAL 9016 (white)
<b>Diffuser</b>	Micro-PRM (micro-prismatic diffuser PMMA) Micro-PRM SH (micro-prismatic diffuser PMMA with hardened glass) PLX (PMMA opal) SHM (hardened mat glass)



Note: The power shown refers to the whole system (tolerance +/- 10%).  
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 24-04-2026