



## RUBIN CLEAN LED SMOOTH

Clean luminaires - surface



Surface mounted luminaire equipped in highly efficient LED sources. Luminary body made from steel sheet, powder coated in white. Optical systems and diffusers mounted in an aluminum frame. The product ensures a homogeneous distribution of light on the iris without shadows and lighter points directly below the LED sources. Luminaire recommended for: emergency departments, intensive care units, and treatment rooms.




Emergency Medical Services, Pruszcz Gdański



## Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
RUBIN CLEAN LED SMOOTH 2700	2835	16,3	3000 / 4000	610 x 310 x 78
RUBIN CLEAN LED SMOOTH 3750	3750	29	3000 / 4000	610 x 310 x 78
RUBIN CLEAN LED SMOOTH 5400	5741 / 6061 / 5607	33,2	3000 / 4000	1210 x 310 x 78 / 620 x 620 x 78
RUBIN CLEAN LED SMOOTH 7500	7875 / 8488 / 7854	42,2	3000 / 4000	1210 x 310 x 78 / 620 x 620 x 78
RUBIN CLEAN LED SMOOTH 10800	10120 / 10680	70	3000 / 4000	1120 x 620 x 78
RUBIN CLEAN LED SMOOTH 15000	14180 / 14960	102	3000 / 4000	1120 x 620 x 78

## Technical drawing:

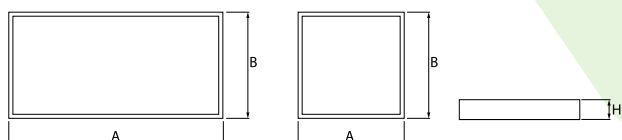

## Light and electrical features:

Light source	LED
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	60000/100000/54000
Lx/By	L80/B10
CRI	>80
SDCM (LED sources)	3/5/4
Operating temperature range [°C]	5 ÷ 30
Driver	standard on/off (E)
Power factor cos φ	>0,95

## Mechanical features:

Assembly	surface mounted on ceiling
Material	steel sheet
Color	RAL 9016 (white)
Diffuser	Micro-PRM (micro-prismatic diffuser PMMA) Micro-PRM SH (micro-prismatic diffuser PMMA with hardened glass) PLX (PMMA opal) SHM (hardened mat glass)

Note: The power shown refers to the whole system (tolerance +/- 10%).  
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 24-04-2024

Dodatkowe informacje / Additional information / Zusätzliche Informationen:

Diody LED Standard vs LED Smooth / Standard LED vs Smooth LED modules / Standard LED vs Smooth LED Module



STANDARD



SMOOTH

**UWAGA / NOTE / ACHTUNG**

W oprawkach typu SMOOTH\* z przesłoną półprzezroczystą tj. MICRO-PRM + SH; MICRO-PRM, SHM pojawia się "efekt cienia" widoczny na zdjęciu.  
\*dotyczy tylko wymiarów 1200x300 i 1200x600 (+/- 5 cm)

In SMOOTH \* luminaires with a semi-transparent diffuser MICRO-PRM + SH; MICRO-PRM, SHM appears "shadow effect" visible in the picture below.  
\* only for dimensions 1200x300 and 1200x600 (+/- 5 cm)

In SMOOTH \* -Leuchten mit einem halbtransparenten Diffusor MICRO-PRM + SH; MICRO-PRM, SHM erscheint als „Schatteneffekt“ im Bild unten sichtbar.  
\* nur für Abmessungen 1200x300 und 1200x600 (+/- 5 cm)

