




RUBIN CLEAN NO FRAME LED

Clean luminaires - surface

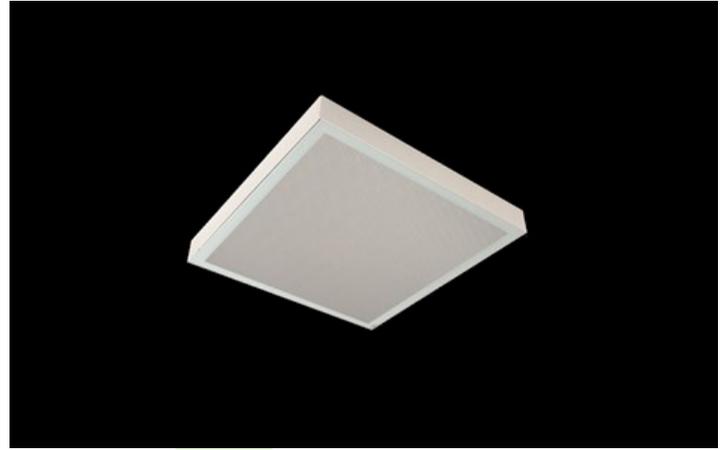


Surface mounted luminaire equipped in highly efficient LED panels. Luminaire body made from steel sheet, powder coated in white. Its characteristic feature is lack of aluminum frame what allows to exclude the unwished-for contamination in clean rooms. There are no visible elements joining the diffuser and the luminaire body. Luminaire recommended for: operating and treatment rooms, as well as intensive care units.



Main parameters:

| Name | Luminous flux LED [lm] | Power of luminaire [W] | Color [K] | Dimensions A x B x H [mm] |
|--------------------------------|------------------------|------------------------|-------------|----------------------------------|
| RUBIN CLEAN NO FRAME LED 2600 | 2538 / 2672 | 13,9 | 3000 / 4000 | 574 x 274 x 69 |
| RUBIN CLEAN NO FRAME LED 3900 | 3807 / 4008 | 20,8 | 3000 / 4000 | 574 x 574 x 69 |
| RUBIN CLEAN NO FRAME LED 4400 | 4442 / 4675 | 24,4 | 3000 / 4000 | 574 x 274 x 69 |
| RUBIN CLEAN NO FRAME LED 5200 | 5076 / 5343 | 27,8 | 3000 / 4000 | 1174 x 274 x 69 / 574 x 574 x 69 |
| RUBIN CLEAN NO FRAME LED 6500 | 6345 / 6679 | 34,7 | 3000 / 4000 | 574 x 574 x 69 |
| RUBIN CLEAN NO FRAME LED 6600 | 6663 / 7013 | 36,6 | 3000 / 4000 | 574 x 574 x 69 |
| RUBIN CLEAN NO FRAME LED 7800 | 7614 / 8015 | 41,7 | 3000 / 4000 | 1174 x 574 x 69 |
| RUBIN CLEAN NO FRAME LED 8800 | 8883 / 9351 | 48,8 | 3000 / 4000 | 1174 x 274 x 69 / 574 x 574 x 69 |
| RUBIN CLEAN NO FRAME LED 10400 | 10152 / 10686 | 55,6 | 3000 / 4000 | 1174 x 574 x 69 |
| RUBIN CLEAN NO FRAME LED 11000 | 11104 / 11689 | 61 | 3000 / 4000 | 574 x 574 x 69 |
| RUBIN CLEAN NO FRAME LED 13200 | 13326 / 14026 | 73,2 | 3000 / 4000 | 1174 x 574 x 69 |
| RUBIN CLEAN NO FRAME LED 17600 | 17766 / 18702 | 97,7 | 3000 / 4000 | 1174 x 574 x 69 |

Technical drawing:

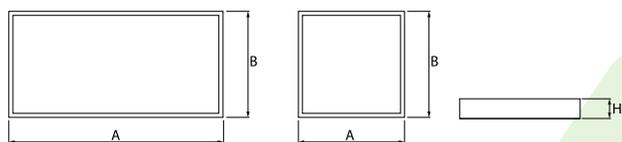

Light and electrical features:

| | |
|--|---|
| Light source | LED |
| Voltage | 220..240 V, 50..60 Hz |
| Lifetime of LED sources [h] | 100000 |
| Lx/By | L80/B10 |
| CRI | >80 |
| SDCM (LED sources) | 3 |
| Photobiological risk class (IEC/EN 62471) | RG0 |
| Operating temperature range [°C] | 5 ÷ 30 |
| Driver | standard on/off (E) DIM DALI (EDD) * |
| Power factor cos φ | >0,95 |

* Variant to specify when ordering

Mechanical features:

| | |
|-----------------|--|
| Assembly | surface mounted on ceiling |
| Material | steel sheet |
| Color | RAL 9016 (white) |
| Diffuser | Micro-PRM SH (micro-prismatic diffuser PMMA with hardened glass) SHM (hardened mat glass) |



Note: The power shown refers to the whole system (tolerance +/- 10%).
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 18-05-2026