




### **RUBIN INDUSTRY SLIGHT LED**

#### **Industrial luminaires**







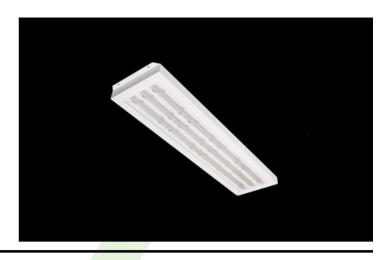

Luminary dedicated for big space industry areas. ceiling mounting. Light distribution made by using high performance lenses. Luminary body made from steel sheet, powder coated in white. The product is recommended for production halls, warehouses and heavy industry.


















## Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
RUBIN INDUSTRY SLIGHT LED 24000	24990	171	4000	1270 x 320 x 55

## **Technical drawing:**



# **Light and electrical features:**

Light source	LED	
Voltage	220240 V, 5060 Hz	
Lifetime of LED sources [h]	100000 (1) / 147000 (2)	
Lx/By	L80/B10 (1) / L70/B50 (2)	
CRI	>80	
SDCM (LED sources)	3	
Operating temperature range [°C]	-25 ÷ 45	
Driver	standard on/off (E)	
Power factor cos φ	>0,95	

## **Mechanical features:**

Assembly	surface mounted on ceiling
Material	steel sheet
Color	RAL 9016 (white)
Diffuser	PC-T (transparent polycarbonate) SH (transparent hardened glass)