



## RUBIN LOOK LED COMPACT

Compact



Surface mounted luminary for LED sources. Luminary body made from steel sheet, powder coated. Luminary recommended for: wards and hospital bathrooms.




"Czarno na białym" hotel, Cracow



**Main parameters:**

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
RUBIN LOOK LED COMPACT 4000	4118	27	4000	595 x 320 x 54
RUBIN LOOK LED COMPACT 8000	8236	55	4000	595 x 595 x 54

**Technical drawing:**

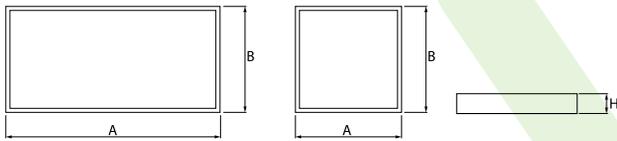

**Light and electrical features:**

<b>Light source</b>	LED
<b>Voltage</b>	220..240 V, 50..60 Hz
<b>Lifetime of LED sources [h]</b>	60000
<b>Lx/By</b>	L80/B10
<b>CRI</b>	>80
<b>SDCM (LED sources)</b>	3
<b>Operating temperature range [°C]</b>	5 ÷ 30
<b>Driver</b>	standard on/off (E)
<b>Power factor cos φ</b>	>0,95

\* Variant to specify when ordering

**Mechanical features:**

<b>Assembly</b>	surface mounted on ceiling
<b>Material</b>	steel sheet
<b>Color</b>	RAL 9006 (grey, metallic, fine structure) RAL 9016 (white) *
<b>Diffuser</b>	PLX (PMMA opal)



Note: The power shown refers to the whole system (tolerance +/- 10%).  
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 24-04-2026