



## RUBIN LOOK LED COMPACT

Compact



Surface mounted luminaire for LED sources. Luminaire body made from steel sheet, powder coated. Luminaire recommended for: wards and hospital bathrooms.




"Czarno na białym" hotel, Cracow



## Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
RUBIN LOOK LED COMPACT 4000	4118	27	4000	595 x 295 x 54
RUBIN LOOK LED COMPACT 8000	8236	55	4000	595 x 595 x 54

## Technical drawing:

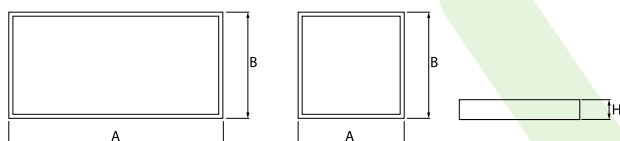

## Light and electrical features:

Light source	LED
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	60000
Lx/By	L80/B10
CRI	>80
SDCM (LED sources)	3
Operating temperature range [°C]	5 ÷ 30
Driver	standard on/off (E)
Power factor cos φ	>0,95

\* Variant to specify when ordering

## Mechanical features:

Assembly	surface mounted on ceiling
Material	steel sheet
Color	RAL 9006 (gray, metallic, fine structure) RAL 9016 (white) *
Diffuser	PLX (PMMA opal)

Note: The power shown refers to the whole system (tolerance +/- 10%).  
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 20-03-2023