




### **RUBIN POS LED**

#### **Surface mounted luminaires**







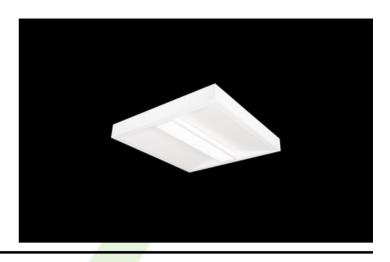

Indirect light fittings are widely used in offices, conference rooms, schools and other public buildings. Soft light prevents light reflections on computer screens and other surfaces. Exclusive appearance enables installation in high standard office buildings, conference rooms and in reception areas.




















## Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
RUBIN POS LED 2600	2525 / 2617	14,4	3000 / 4000	640 x 640 x 78
RUBIN POS LED 4400	4406 / 4565	24,7	3000 / 4000	640 x 640 x 78
RUBIN POS LED 6600	6608 / 6848	35,3	3000 / 4000	640 x 640 x 78

# **Technical drawing:**



# Light and electrical features:

Light source	LED
Voltage	220240 V, 5060 Hz
Lifetime of LED sources [h]	100000 (1) / 147000 (2)
Lx/By	L80/B10 (1) / L70/B50 (2)
CRI	>80
SDCM (LED sources)	3
Operating temperature range [°C]	5 ÷ 30
Driver	standard on/off (E) DIM DALI (EDD) *
Power factor $\cos \phi$	>0,95

<sup>\*</sup> Variant to specify when ordering

### **Mechanical features:**

Assembly	surface mounted on ceiling	
Material	steel sheet	
Color	RAL 9016 (white)	
Diffuser	Micro-PRM (micro-prismatic diffuser PMMA)	

### **Additional information:**

The luminaire can be made in CLO version.