




## SNAKE V LED

Architectural luminaires

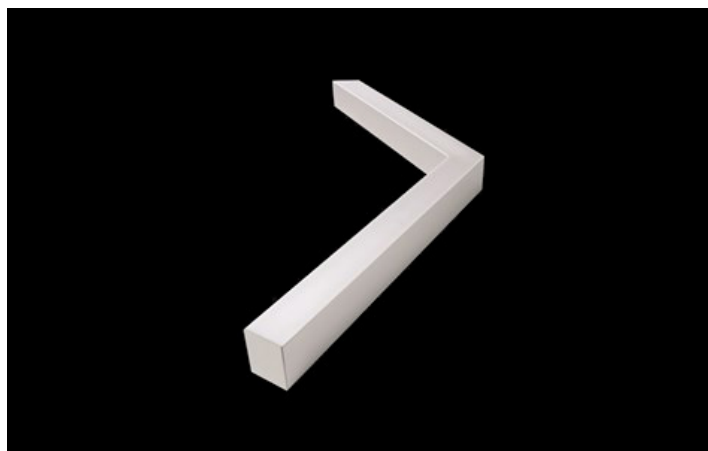

Luminary equipped with the highly efficient LED source. Body made from aluminum profile. Optical system provides regular light distribution on diffuser. There are two kinds of diffusers available: opal and PMMA micro-prism. Luminary adapted to be mounted on suspensions or directly on a solid ceiling construction. The suspended version is equipped with the suspension system which is 1500 mm long, and has the smooth regulation of the suspension length. These luminaires may be dedicated to decorate the representative places such as: entrances, receptions, restaurants, halls, etc.




Domena.pl offices, Bydgoszcz



## Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
SNAKE V LED 2600	2525 / 2617	14,4	3000 / 4000	590/590 x 63 x 74
SNAKE V LED 4400	4406 / 4565	24,7	3000 / 4000	590/590 x 63 x 74
SNAKE V LED 5200	5051 / 5234	28,2	3000 / 4000	1150/1150 x 63 x 74
SNAKE V LED 8800	8811 / 9130	49,1	3000 / 4000	1150/1150 x 63 x 74

## Technical drawing:



## Light and electrical features:

Light source	LED
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	100000 (1) / 147000 (2)
Lx/By	L80/B10 (1) / L70/B50 (2)
CRI	>80
SDCM (LED sources)	3
Operating temperature range [°C]	5 ÷ 30
Driver	standard on/off (E)
Power factor cos φ	>0,95

## Mechanical features:

Assembly	directly mounted to ceiling construction or surface mounted on slings using accessories
Material	aluminum
Color	anodised aluminum
Diffuser	Micro-PRM (micro-prismatic diffuser PMMA) PLX (PMMA opal)

Note: The power shown refers to the whole system (tolerance +/- 10%).  
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 17-02-2026