




#### STREETPARK MINI LED PREMIUM

#### **Outdoor luminaires**





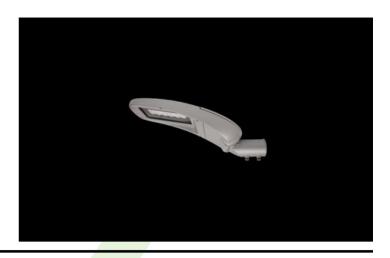

Powder painted aluminum cast housing highly weather proof. Luminaire is equipped with adjustable handle designed for mounting on posts and arms of 48 mm diameter. Level of tightness IP66. Diffuser is made of hardened glass. Following color temperatures are available: 4000 K. It is possible to program an autonomous multi-level or manual power reduction for specific customer needs by using a specialized power supply in the luminaire. The luminaires have overvoltage protection as standard based on the functionality of the power supplies.

















## Main parameters:

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
STREETPARK MINI LED PREMIUM HO 3500	3280	25	4000	507 x 209 x 144
STREETPARK MINI LED PREMIUM HO 5500	5755	42	4000	507 x 209 x 144
STREETPARK MINI LED PREMIUM HE 8000	8090	55	4000	507 x 209 x 144

## **Technical drawing:**



# Light and electrical features:

Light source	LED
Voltage	220240 V, 5060 Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
CRI	>70
Operating temperature range [°C]	-40 ÷ 40
Driver	standard on/off (E)
Power factor $\cos \phi$	>0,95

### **Mechanical features:**

Assembly	mounted on poles
Material	aluminum
Color	RAL 9006 (grey)
Diffuser	hardened transparent glass