



## STREETPARK LED COMPACT

Compact



Powder painted aluminum cast housing highly weather proof. Luminaire is equipped with adjustable handle designed for mounting on posts and arms of 60 mm diameter. Level of tightness IP66. Diffuser is made of hardened glass. Following color temperatures are available: 5700 K.





Polna street, Kodeń



**Main parameters:**

Name	Luminous flux LED [lm]	Power of luminaire [W]	Color [K]	Dimensions A x B x H [mm]
STREETPARK S LED COMPACT HO 5000	5588	42	5700	628 x 266 x 99
STREETPARK S LED COMPACT HO 10000	11175	83	5700	628 x 266 x 99

**Technical drawing:**

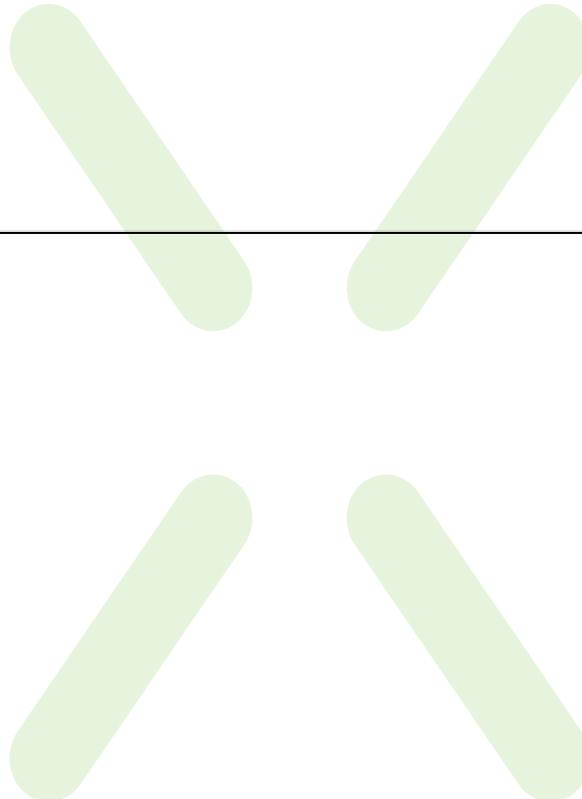


**Light and electrical features:**

<b>Light source</b>	LED
<b>Voltage</b>	220..240 V, 50..60 Hz
<b>Lifetime of LED sources [h]</b>	100000
<b>Lx/By</b>	L80/B10
<b>CRI</b>	>70
<b>Operating temperature range [°C]</b>	-40 ÷ 40
<b>Driver</b>	standard on/off (E)
<b>Power factor cos φ</b>	>0,95

**Mechanical features:**

<b>Assembly</b>	mounted on poles
<b>Material</b>	aluminum
<b>Color</b>	RAL 9007 (dark grey)
<b>Diffuser</b>	SHM (hardened mat glass) hardened transparent glass



Note: The power shown refers to the whole system (tolerance +/- 10%).  
The given luminous flux refers to LED light sources (tolerance +/- 10% depends on the value of the colour temperature).  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 17-04-2026