

Product: X-LINE PRO 4000 LOUVER EDD 24 830 LINE / L-1120MM

Index: 19.2110.3333.24



## **Description**

Light fitting made out of aluminium profile. Simple luminaire construction (no mounting plates or LED plates). LEDs in the standard version are mounted by inserting them into the slot in the middle of the profile. Direct (down) light distribution. Available optical systems: anti-glare louvre (silver, white or black on request). The luminaire is available in a line version. Available colors: anodized aluminum, black RAL 9005, white RAL 9016 or any color from the RAL palette on request. Gray, white or black polycarbonate end caps. Plastic plate (HIPS) masking the electronics compartment (only in luminaires with direct distribution). Possibility to use an aluminum snap-on aluminum cover. The use of luminaires typically for offices.

#### **Product information**

Category	Surface mounted luminaires		
Family	X-LINE PRO LINE		
· carring	X EINE I NO EINE		
Name	X-LINE PRO 4000 LOUVER EDD 24 830 LINE / L-1120MM		
Ivallic	X-EINE FIXO 4000 EOOVER EDD 24 050 EINE / E-1120WW		
Local ave	10 2110 2222 24		
Index	19.2110.3333.24		
















## Light and electrical data

Light course	LED
Light source	
Luminous flux LED [lm]	4212
LED power [W]	22,4
Luminaire luminous flux [lm]	4089,9
Power of luminaire [W]	25,5
Luminaire's light efficiency [lm/W]	160,4
Color of the light [K]	3000
CRI	>80
SDCM (LED sources)	3
Beam angle [°]	(C0-C180) / (C90-C270) - 82,4° / 76,2°
Photobiological risk class (IEC/EN 62471)	RG0
Protection against electric shock	I
Protection degree	IP40
Voltage	220240 V, 5060 Hz
Lifetime of LED sources [h]	100000
Lx/By	L80/B10
Operating temperature range [°C]	5 ÷ 35
Driver	DIM DALI (EDD)
Power factor cos φ	>0,95
Circuit load capacity	17 (B10), 28 (B16), 26 (C10), 41 (C16)



Mechanical data		Assembly	directly mounted to ceiling construction or surface mounted on slings using accessories
Δ	□ <u></u>	Material	aluminum
	, and the second	Color	anodised aluminum
		Diffuser	LOUVER (anti-glare louver)
		Impact resistant	IK04
		Dimensions [mm]	1120 x 60 x 70

# A graph of light

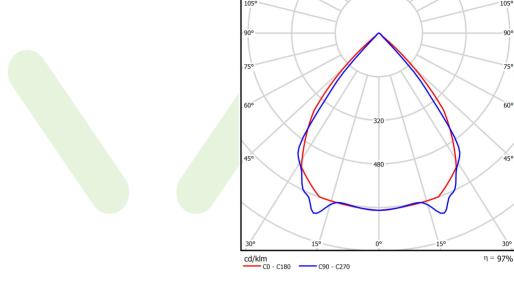





### **Accessories**


Index 6E1-500KWAN1P-5

Name SUSPENSION NEW TYPE-A 24 LENGHT 1,5M WIRE 5X 1-POINT




Index 19.2110.0003.24

Name X-LINE PRO LOUVER LINE SURFACE FRONT+END SET 24




Index 19.3272.1205.00

Name SUSPENSION NEW TYPE-E LENGHT-1,5 METER WITHOUT WIRE 1-POINT




Index 19.2110.0004.24

Name X-LINE PRO LOUVER LINE SURFACE MIDDLE SET 24



Index 19.2110.0001.24

Name X-LINE PRO LOUVER LINE FRONT+END SET 24



Index 19.2110.0002.24

Name X-LINE PRO LOUVER LINE MIDDLE SET 24

