

Product: BERYL KN DUO LED UP&DOWN 4x2,4W 5°-21° E IP65 34 840

Index: 19.3015.0004.34



Description

Luminaire adapted to be mounted on walls. High lighting efficiency LEDs were used as light sources. Optical system consists of professional lens that provide light distribution of 5-21° angle. Owing to the optical system solutions, the product is highly effective. Its body is made from anodized aluminum profile. It is resistant to solids, dust, and liquids penetration – IP40 or IP65. This type of luminaire is recommended for decorative or accent illumination, e.g. in restaurants, pubs, or cafes.

Product information


| | |
|----------|--|
| Category | Architectural luminaires |
| Family | BERYL KN DUO LED UP&DOWN |
| Name | BERYL KN DUO LED UP&DOWN 4x2,4W 5°-21° E IP65 34 840 |
| Index | 19.3015.0004.34 |



Light and electrical data

| | |
|-------------------------------------|--|
| Light source | LED |
| Luminous flux LED [lm] | 748 |
| LED power [W] | 10 |
| Luminaire luminous flux [lm] | 622 |
| Power of luminaire [W] | 11 |
| Luminaire's light efficiency [lm/W] | 56,5 |
| Color of the light [K] | 4000 |
| CRI | >80 |
| SDCM (LED sources) | 5 |
| Beam angle [°] | (C0-C180) / (C90-C270) - 9,6° / 37° |
| Protection against electric shock | I |
| Protection degree | IP65 |
| Voltage | 220..240 V, 50..60 Hz |
| Lifetime of LED sources [h] | 50000 |
| Lx/By | L70/B50 |
| Operating temperature range [°C] | -20 ÷ 30 |
| Driver | standard on/off (E) |
| Circuit load capacity | 40 (B10), 78 (B16), 132 (C10), 158 (C16) |

Mechanical data

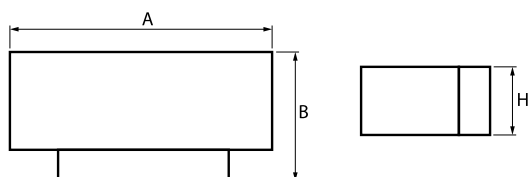

| | |
|------------------|---------------------------|
| Assembly | mounted on wall |
| Material | aluminum |
| Color | RAL 9016 (white) |
| Diffuser | transparent polycarbonate |
| Impact resistant | IK04 |
| Weight [kg] | 0,51 |
| Dimensions [mm] | 150 x 82 x 50 |

A graph of light



Luminous flux tolerance +/- 10%. Power tolerance +/- 10%.
Technical data may be changed. Photos of the luminaires may differ from reality.
Date of last update: 10-08-2022