


Product: DOUBLE SPHERE LED 25000 EDD PLX 34 830 / S-1,5M

Index: 19.3016.0002.34

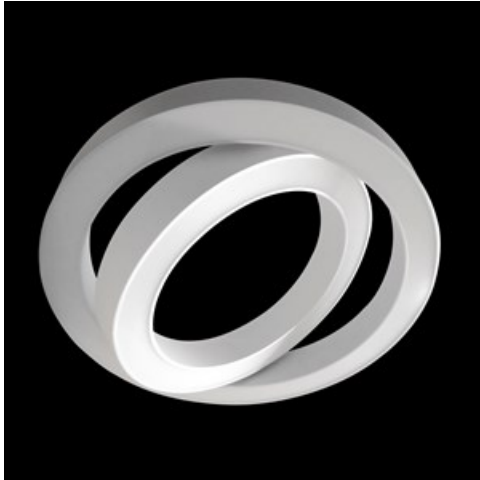

Description

Round suspended luminaire equipped with highly efficient LED sources, designed for interiors with high stylistic requirements. The product consists of two glowing rings that can be adjusted relative to each other. Thanks to this, we obtain a very interesting effect. Dedicated application: representative room facilities such as halls, atria, receptions in shopping malls, museums, offices and many other public facilities.

Product information

| | |
|----------|---|
| Category | Architectural luminaires |
| Family | DOUBLE SPHERE LED |
| Name | DOUBLE SPHERE LED 25000 EDD PLX 34 830 / S-1,5M |
| Index | 19.3016.0002.34 |




Light and electrical data

| | |
|-------------------------------------|--|
| Light source | LED |
| Luminous flux LED [lm] | 25168 |
| LED power [W] | 190 |
| Luminaire luminous flux [lm] | 13198 |
| Power of luminaire [W] | 213 |
| Luminaire's light efficiency [lm/W] | 62 |
| Color of the light [K] | 3000 |
| CRI | >80 |
| SDCM (LED sources) | 3 |
| Beam angle [°] | (C0-C180) / (C90-C270) - 113,4° / 111,8° |
| Protection against electric shock | I |
| Protection degree | IP20 |
| Voltage | 220..240 V, 50..60 Hz |
| Lifetime of LED sources [h] | 60000 |
| Lx/By | L80/B10 |
| Operating temperature range [°C] | 5 ÷ 30 |
| Driver | DIM DALI (EDD) |
| Power factor cos φ | >0,95 |
| Circuit load capacity | 2 (B10), 3 (B16), 3(C10), 8 (C16) |

Mechanical data

| | |
|------------------|---------------------------|
| Assembly | surface mounted on slings |
| Material | aluminum |
| Color | RAL 9016 (white) |
| Diffuser | PLX (PMMA opal) |
| Impact resistant | IK03 |
| Weight [kg] | 6,8 |
| Dimensions [mm] | 887 x 100 |



A graph of light

