


**Product:** TYTAN STALACTITE SLIM 1000 26° E 840 / S-1,5M H-600 RAL3011

**Index:** 19.3037.0002.00

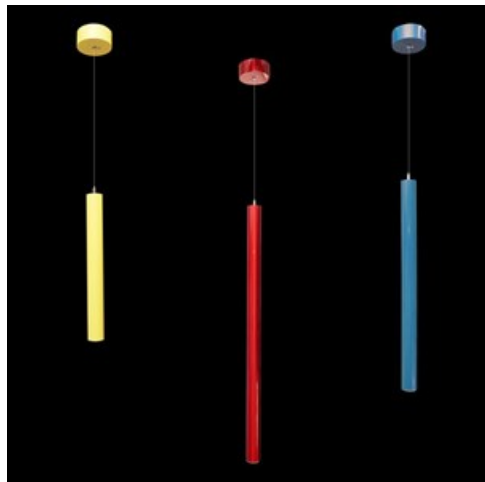

## Description

Suspended luminaire with spot lighting, performing decorative functions or additional light. The longitudinal tubular housing made of aluminum. Various length variants, a large color palette allowing for different colors for the designed interiors and adjustable suspension height are available for selection. Application: restaurants and cafes, dining rooms and kitchens, representative receptions, waiting rooms.

## Product information


Category	Architectural luminaires
Family	TYTAN STALACTITE SLIM
Name	TYTAN STALACTITE SLIM 1000 26° E 840 / S-1,5M H-600 RAL3011
Index	19.3037.0002.00



## Light and electrical data


Light source	LED
Luminous flux LED [lm]	1055
LED power [W]	8
Luminaire luminous flux [lm]	1004
Power of luminaire [W]	9
Luminaire's light efficiency [lm/W]	111,6
Color of the light [K]	4000
CRI	>80
SDCM (LED sources)	2
Beam angle [°]	(C0-C180) / (C90-C270) - 22,6° / 23,2°
Protection against electric shock	I
Protection degree	IP20
Voltage	220..240 V, 50..60 Hz
Lifetime of LED sources [h]	>100000
Lx/By	L80/B10
Operating temperature range [°C]	5 ÷ 30
Driver	standard on/off (E)
Power factor cos φ	>0,95
Circuit load capacity	46 (B10), 74 (B16), 72 (C10), 115 (C16)

## Mechanical data



Assembly	surface mounted on slings
Material	aluminum
Color	RAL 3011 (dark red)
Impact resistant	IK06
Weight [kg]	1,1
Dimensions [mm]	Ø45 x 600

## A graph of light

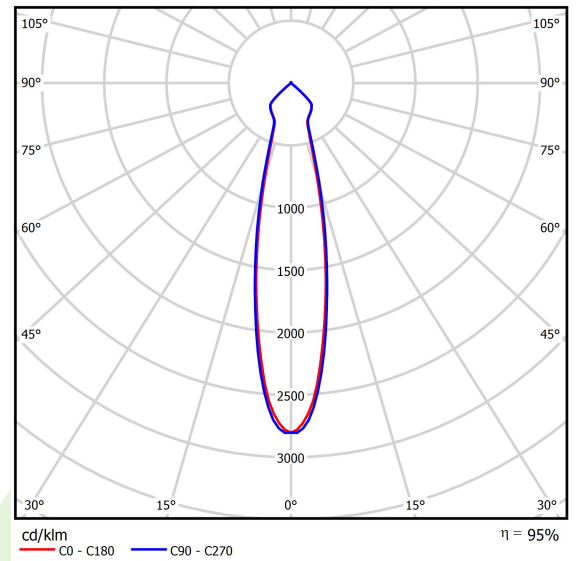

Luminous flux tolerance +/- 10%. Power tolerance +/- 10%.  
Technical data may be changed. Photos of the luminaires may differ from reality.  
Date of last update: 10-08-2022