


**Product:** KUBIK CEILING SLIM LED 1X1,7W 24°/4000K E IP65 25

**Index:** 19.3151.0001.25

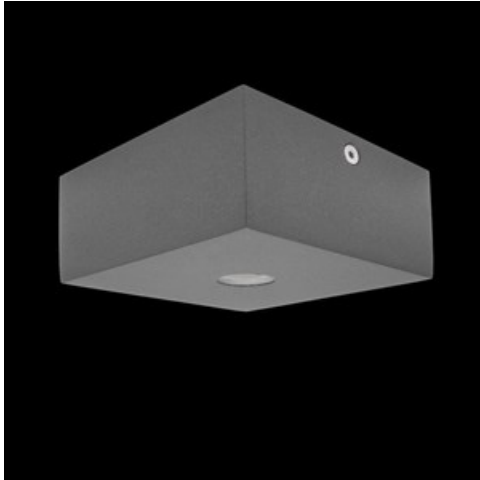

## Description

An outdoor fitting designed for ceiling mounting. The body is made of aluminum. Energy-efficient fitting made of component parts produced by renowned companies. Ergonomic shapes of the fitting enable the application of the Kubik-type fitting almost in every building. The assembly is very easy. Level of protection against penetration of dust and water - IP65. Kubik Ceiling Slim LED luminaire relative to the standard version has a smaller height. Kubik Ceiling Slim LED is more slim, and thus stands out from the ceiling for only 5 cm.

## Product information

|          |   |
|----------|---|
| Category | Outdoor luminaires                                |
| Family   | KUBIK CEILING SLIM LED                            |
| Name     | KUBIK CEILING SLIM LED 1X1,7W 24°/4000K E IP65 25 |
| Index    | 19.3151.0001.25                                   |



## Light and electrical data

|                                     |   |
|-------------------------------------|---|
| Light source                        | LED                                       |
| Luminous flux LED [lm]              | 152                                       |
| LED power [W]                       | 2   |
| Luminaire luminous flux [lm]        | 145                                       |
| Power of luminaire [W]              | 3   |
| Luminaire's light efficiency [lm/W] | 48,3                                      |
| Color of the light [K]              | 4000                                      |
| CRI                                 | >80                                       |
| SDCM (LED sources)                  | 5   |
| Beam angle [°]                      | (C0-C180) / (C90-C270) - 36° / 36°        |
| Protection against electric shock   | I   |
| Protection degree                   | IP65                                      |
| Voltage                             | 220..240 V, 50..60 Hz                     |
| Lifetime of LED sources [h]         | 50000                                     |
| Lx/By                               | L70/B50                                   |
| Operating temperature range [°C]    | -25 ÷ 30                                  |
| Driver                              | standard on/off (E)                       |
| Power factor cos φ                  | >0,5                                      |
| Circuit load capacity               | 80 (B10), 157 (B16), 265 (C10), 317 (C16) |

## Mechanical data



|                  |   |
|------------------|---|
| Assembly         | surface mounted on ceiling                      |
| Material         | aluminum  |
| Color            | RAL 7016 (anthracite, metallic, fine structure) |
| Diffuser         | transparent polycarbonate                       |
| Impact resistant | IK09  |
| Dimensions [mm]  | 100 x 100 x 50                                  |

## A graph of light

